

log4c

1.2.1

Generated by Doxygen 1.7.5.1

Sun Oct 30 2011 04:19:01

## Contents

<b>1</b>	<b>Log4c : Logging for C Library</b>	<b>1</b>
1.1	Summary . . . . .	1
1.2	Requirements . . . . .	1
1.2.1	Platforms . . . . .	1
1.2.2	Software . . . . .	2
1.3	Installation . . . . .	2
1.3.1	Building from source tarballs . . . . .	2
1.3.2	Using RPMs . . . . .	3
1.4	Configuration . . . . .	3
1.4.1	Configuration files . . . . .	3
1.4.2	Configuration syntax . . . . .	3
1.4.3	Environment variables . . . . .	4
1.5	Customization . . . . .	4
1.6	Thanks . . . . .	4
1.7	Copyright . . . . .	4
<b>2</b>	<b>Todo List</b>	<b>5</b>
<b>3</b>	<b>Deprecated List</b>	<b>5</b>
<b>4</b>	<b>Bug List</b>	<b>5</b>
<b>5</b>	<b>Data Structure Index</b>	<b>6</b>
5.1	Data Structures . . . . .	6
<b>6</b>	<b>File Index</b>	<b>6</b>
6.1	File List . . . . .	6
<b>7</b>	<b>Data Structure Documentation</b>	<b>8</b>
7.1	log4c_appender_type Struct Reference . . . . .	8
7.1.1	Detailed Description . . . . .	8
7.2	log4c_buffer_t Struct Reference . . . . .	8
7.2.1	Detailed Description . . . . .	8
7.3	log4c_layout_type Struct Reference . . . . .	9
7.3.1	Detailed Description . . . . .	9

7.4	log4c_location_info_t Struct Reference . . . . .	9
7.4.1	Detailed Description . . . . .	9
7.5	log4c_logging_event_t Struct Reference . . . . .	10
7.5.1	Detailed Description . . . . .	10
7.6	log4c_rc_t Struct Reference . . . . .	11
7.6.1	Detailed Description . . . . .	11
7.7	log4c_rollingpolicy_type Struct Reference . . . . .	11
7.7.1	Detailed Description . . . . .	11
<b>8</b>	<b>File Documentation</b>	<b>12</b>
8.1	appender.h File Reference . . . . .	12
8.1.1	Detailed Description . . . . .	13
8.1.2	Define Documentation . . . . .	14
8.1.3	Typedef Documentation . . . . .	14
8.1.4	Function Documentation . . . . .	14
8.2	appender_type_mmap.h File Reference . . . . .	18
8.2.1	Detailed Description . . . . .	19
8.2.2	Variable Documentation . . . . .	20
8.3	appender_type_rollingfile.h File Reference . . . . .	20
8.3.1	Detailed Description . . . . .	21
8.3.2	Function Documentation . . . . .	21
8.3.3	Variable Documentation . . . . .	23
8.4	appender_type_stream.h File Reference . . . . .	23
8.4.1	Detailed Description . . . . .	24
8.4.2	Variable Documentation . . . . .	25
8.5	appender_type_stream2.h File Reference . . . . .	25
8.5.1	Detailed Description . . . . .	26
8.5.2	Function Documentation . . . . .	27
8.5.3	Variable Documentation . . . . .	28
8.6	appender_type_syslog.h File Reference . . . . .	28
8.6.1	Detailed Description . . . . .	29
8.6.2	Variable Documentation . . . . .	29
8.7	buffer.h File Reference . . . . .	29
8.7.1	Detailed Description . . . . .	30

8.8	category.h File Reference . . . . .	30
8.8.1	Detailed Description . . . . .	32
8.8.2	Define Documentation . . . . .	32
8.8.3	Typedef Documentation . . . . .	32
8.8.4	Function Documentation . . . . .	33
8.9	init.h File Reference . . . . .	42
8.9.1	Detailed Description . . . . .	43
8.9.2	Function Documentation . . . . .	43
8.10	layout.h File Reference . . . . .	44
8.10.1	Detailed Description . . . . .	45
8.10.2	Define Documentation . . . . .	45
8.10.3	Typedef Documentation . . . . .	46
8.10.4	Function Documentation . . . . .	46
8.11	layout_type_basic.h File Reference . . . . .	49
8.11.1	Detailed Description . . . . .	50
8.12	layout_type_basic_r.h File Reference . . . . .	50
8.12.1	Detailed Description . . . . .	51
8.13	layout_type_dated.h File Reference . . . . .	51
8.13.1	Detailed Description . . . . .	52
8.14	layout_type_dated_r.h File Reference . . . . .	52
8.14.1	Detailed Description . . . . .	53
8.15	location_info.h File Reference . . . . .	53
8.15.1	Detailed Description . . . . .	54
8.15.2	Define Documentation . . . . .	54
8.16	logging_event.h File Reference . . . . .	55
8.16.1	Detailed Description . . . . .	56
8.16.2	Function Documentation . . . . .	56
8.17	priority.h File Reference . . . . .	56
8.17.1	Detailed Description . . . . .	57
8.17.2	Enumeration Type Documentation . . . . .	58
8.17.3	Function Documentation . . . . .	58
8.18	rc.h File Reference . . . . .	59
8.18.1	Detailed Description . . . . .	59
8.18.2	Function Documentation . . . . .	59

8.18.3 Variable Documentation . . . . .	60
8.19 rollingpolicy.h File Reference . . . . .	60
8.19.1 Detailed Description . . . . .	61
8.19.2 Define Documentation . . . . .	62
8.19.3 Typedef Documentation . . . . .	62
8.19.4 Function Documentation . . . . .	62
8.20 rollingpolicy_type_sizewin.h File Reference . . . . .	65
8.20.1 Detailed Description . . . . .	66
8.20.2 Typedef Documentation . . . . .	67
8.20.3 Function Documentation . . . . .	67
8.21 version.h File Reference . . . . .	68
8.21.1 Detailed Description . . . . .	69
8.21.2 Define Documentation . . . . .	69
8.21.3 Function Documentation . . . . .	69
8.21.4 Variable Documentation . . . . .	69

## 1 Log4c : Logging for C Library

### 1.1 Summary

Log4c is a library of C for flexible logging to files, syslog and other destinations. It is modeled after the Log for Java library (<http://jakarta.apache.org/log4j/>), staying as close to their API as is reasonable. Here is a short introduction to Log4j which describes the API, and design rationale.

Mark Mendel started a parallel log4c projet with a different philosophy. The design is macro oriented, so much lighter and faster which perfect for kernel development.

Log4c is also available from SourceForge (<http://www.sourceforge.net/projects/log4c/>). This is work in progress.

### 1.2 Requirements

#### 1.2.1 Platforms

log4c was successfully compiled and run on the following platforms :

- HP-UX release 11.00
- Tru 64 release 4.0F and 5.1
- Red Hat Linux Intel release 7.x, 8, 9

- Red Hat Enterprise Linux 3, 4
- Solaris Intel release 8, 9, 10
- FreeBSD 6.1-RELEASE
- AIX 5.3 (with xlc compiler)
- Mac OS X
- Windows X

log4c should compile and run on the following platforms :

- The BSD family
- Other Linux distributions

### 1.2.2 Software

The following softwares are needed to generate log4c:

- GCC 3.0.1+, to generate log4c, but hopefully not to use it.
- doxygen 1.2.13+, a documentation system for C/C++ needed to generate the documentation.
- graphviz, the AT&T Graph Visualization Tools also needed to generate the documentation.

For the moment, log4c uses specific GCC extensions, like `__attribute__`, so you will need GCC to compile it. This will probably change one day.

## 1.3 Installation

### 1.3.1 Building from source tarballs

on SourceForge:

- `log4c-1.2.1.tar.gz`

The log4c package uses the GNU autotools compilation and installation framework. The following commands should build log4c on the supported platforms:

```
$ gzip -dc log4c-1.2.1.tar.gz | tar tvf -
$ cd log4c-1.2.1/
$ ./configure --prefix=/path/of/installation
$ make
$ make install
```

Checkout the `INSTALL` file for installation and the generated doxygen documentation for more information.

### 1.3.2 Using RPMs

FC7 RPMs on SourceForge:

- `log4c-1.2.1-1.i386.rpm`
- `log4c-devel-1.2.1-1.i386.rpm`
- `log4c-doc-1.2.1-1.i386.rpm`

The following command install the log4c RPMs :

```
$ sudo rpm -Uvh log4c-1.2.1.i386.rpm log4c-devel-1.2.1.i386.rpm
```

## 1.4 Configuration

### 1.4.1 Configuration files

log4c searches the folloing files to load its configuration:

- `${LOG4C_RCPATH}/log4crc`
- `${HOME}/.log4crc`
- `./log4crc`

The environment variable `LOG4C_RCPATH` holds the prefix used for installation.

### 1.4.2 Configuration syntax

The `log4crc` configuration file uses an XML syntax. The root element is `<log4c>` and it can be used to control the configuration file version interface with the attribute "version". The following 4 elements are supported: `<config>`, `<category>`, `<appender>` and `<layout>`.

- The `<config>` element controls the global log4c configuration. It has 3 sub elements. The `<nocleanup>` flag inhibits the log4c destructors routines. The `<bufsize>` element sets the buffer size used to format **log4c\_logging\_event\_t** (p. 10) objects. If is set to 0, the allocation is dynamic (the `<debug>` element is currently unused).
- The `<category>` element has 3 possible attributes: the category "name", the category "priority" and the category "appender". Future versions will handle multiple appenders per category.
- The `<appender>` element has 3 possible attributes: the appender "name", the appender "type", and the appender "layout".

- The `<layout>` element has 2 possible attributes: the layout `"name"` and the layout `"type"`.

Here's the default `log4c` configuration file :

This initial version of the `log4c` configuration file syntax is quite different from `log4j`. XML seemed the best choice to keep the `log4j` configuration power in a C API.

#### 1.4.3 Environment variables

- `LOG4C_RCPATH` holds the path to the main `log4c` configuration file
- `LOG4C_PRIORITY` holds the `"root"` category priority
- `LOG4C_APPENDER` holds the `"root"` category appender

## 1.5 Customization

This section will, one day, briefly describe how to define custom appenders and custom layouts. Be patient or checkout the source.

## 1.6 Thanks

Mark Mendel for his work on a previous version of `log4c`.

This project would not have existed without Ceki Gulcu, the creator and maintainer of `Log4j`, nor without Bastiaan Bakker, who initiated me with `Log4Cpp`.

Many thanks to

- Joel Schaubert for many contributions
- Robert Byrne for Windows port and also many contributions
- Olger Warnier for the Mac OS X port
- Jeff Smith for writing a primer on how to use `Log4c` effectively

## 1.7 Copyright

All software in this package is Copyright (C) 2003-2004 Meiosys <http://www.-meiosys.com> and Cedric Le Goater and is distributed under the LGPL License. See the `COPYING` file for full legal details.

## 2 Todo List

### File appender.h (p. 12)

the appender interface needs a better configuration system depending on the layout type. The udata field is a just a trick.

### File layout.h (p. 44)

the layout interface needs a better configuration system depending on the layout type. The udata field is a just a trick.

a pattern layout would be welcomed !!

### Global `log4c_category_get_chainedpriority` (p. 35) (`const log4c_category_t *a_category`)

the `log4c_category_t` is designed so that this method executes as quickly as possible. It could even be faster if the set priority was propagated through the children hierarchy of a category.

### Global `log4c_category_set_appender` (p. 41) (`log4c_category_t *a_category, struct __log4c_appender *a_appender`)

need multiple appenders per category

### Class `log4c_location_info_t` (p. 9)

this is not used

### Global `log4c_logging_event_new` (p. 56) (`const char *a_category, int a_priority, const char *a_message`)

need to handle multi-threading (NDC)

## 3 Deprecated List

### Global `log4c_appender_type_define` (p. 14) (`a_type`)

This macro, and the static initialization of appenders in general, is deprecated. Use rather the `log4c_appender_type_set()` (p. 18) function to initialize your appenders before calling `log4c_init()` (p. 43)

### Global `log4c_layout_type_define` (p. 45) (`a_type`)

This macro, and the static initialization of layouts in general, is deprecated. Use rather the `log4c_layout_type_set()` (p. 49) function to initialize your appenders before calling `log4c_init()` (p. 43)

## 4 Bug List

### Global `log4c_appender_append` (p. 14) (`log4c_appender_t *a_appender, log4c_logging_event_t (p. 10) *a_event`)

is this the right place to open an appender ?

### Global `log4c_category_get` (p. 34) (`const char *a_name`)

the root category name should be "" not "root". \*

## 5 Data Structure Index

### 5.1 Data Structures

Here are the data structures with brief descriptions:

<b>log4c_appender_type</b> Log4c appender type class	8
<b>log4c_buffer_t</b> Buffer object	8
<b>log4c_layout_type</b> Log4c layout type class	9
<b>log4c_location_info_t</b> Logging location information	9
<b>log4c_logging_event_t</b> Logging event object	10
<b>log4c_rc_t</b> Resource configuration object	11
<b>log4c_rollingpolicy_type</b> Log4c rollingpolicy type. Defines the interface a specific policy must provide to the rollingfile appender	11

## 6 File Index

### 6.1 File List

Here is a list of all documented files with brief descriptions:

<b>appender.h</b> Implement this interface for your own strategies for printing log statements	12
<b>appender_type_mmap.h</b> Log4c mmap(2) appender interface	18
<b>appender_type_rollingfile.h</b> Log4c rolling file appender interface	20
<b>appender_type_stream.h</b> Log4c stream appender interface	23
<b>appender_type_stream2.h</b> Log4c stream2 appender interface	25

<b>appender_type_syslog.h</b>	
Log4c syslog(3) appender interface	28
<b>buffer.h</b>	
Log4c buffer	29
<b>category.h</b>	
Central class in the log4c package	30
<b>config-win32.h</b>	??
<b>init.h</b>	
Log4c constructors and destructors	42
<b>layout.h</b>	
Interface for user specific layout format of log4c_logging_event events	44
<b>layout_type_basic.h</b>	
Implement a basic layout	49
<b>layout_type_basic_r.h</b>	
Implement a basic_r layout	50
<b>layout_type_dated.h</b>	
Implement a dated layout	51
<b>layout_type_dated_r.h</b>	
Implement a dated_r layout	52
<b>location_info.h</b>	
The internal representation of caller location information	53
<b>logging_event.h</b>	
Internal representation of logging events	55
<b>priority.h</b>	
The priority class provides importance levels with which one can categorize log messages	56
<b>rc.h</b>	
Log4c resource configuration	59
<b>rollingpolicy.h</b>	
Log4c rolling policy interface. Defines the interface for managing and providing rolling policies	60

**rollingpolicy\_type\_sizewin.h**

Log4c rolling file size-win interface. Log4c ships with (and defaults to) the classic size-window rollover policy: this triggers rollover when files reach a maximum size. The first file in the list is always the current file; when a rollover event occurs files are shifted up by one position in the list--if the number of files in the list has already reached the max then the oldest file is rotated out of the window

65

**version.h**

Log4c version information

68

## 7 Data Structure Documentation

### 7.1 log4c\_appender\_type Struct Reference

log4c appender type class

```
#include <appender.h>
```

#### 7.1.1 Detailed Description

log4c appender type class

Attributes description:

- name appender type name
- open
- append
- close

The documentation for this struct was generated from the following file:

- **appender.h**

### 7.2 log4c\_buffer\_t Struct Reference

buffer object

```
#include <buffer.h>
```

#### 7.2.1 Detailed Description

buffer object

Attributes description:

- `size` current size of the buffer
- `maxsize` maximum size of the buffer. 0 means no limitation.
- `data` raw data

The documentation for this struct was generated from the following file:

- **buffer.h**

### 7.3 log4c\_layout\_type Struct Reference

log4c layout type class

```
#include <layout.h>
```

#### 7.3.1 Detailed Description

log4c layout type class

Attributes description:

- `name` layout type name
- `format`

The documentation for this struct was generated from the following file:

- **layout.h**

### 7.4 log4c\_location\_info\_t Struct Reference

logging location information

```
#include <location_info.h>
```

#### 7.4.1 Detailed Description

logging location information

Attributes description:

- `loc_file` file name
- `loc_line` file line
- `loc_function` function name
- `loc_data` user data

**Todo** this is not used

The documentation for this struct was generated from the following file:


- **location\_info.h**

## 7.5 log4c\_logging\_event\_t Struct Reference

logging event object

```
#include <logging_event.h>
```

Collaboration diagram for log4c\_logging\_event\_t:

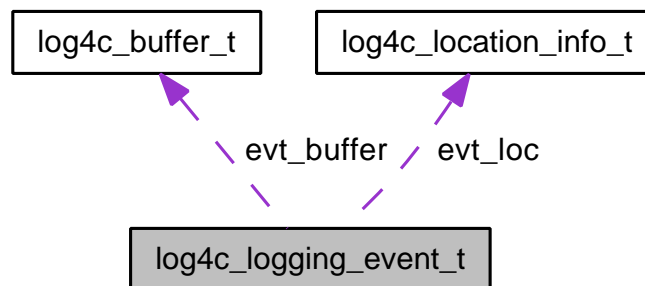

### 7.5.1 Detailed Description

logging event object

Attributes description:

- `evt_category` category name.
- `evt_priority` priority of logging event.
- `evt_msg` The application supplied message of logging event.
- `evt_buffer` a pre allocated buffer to be used by layouts to format in a multi-thread environment.
- `evt_rendered_msg` The application supplied message after layout format.
- `evt_timestamp` The number of seconds elapsed since the epoch (1/1/1970 00:00:00 UTC) until logging event was created.
- `evt_loc` The event's location information

The documentation for this struct was generated from the following file:

- **logging\_event.h**

## 7.6 log4c\_rc\_t Struct Reference

resource configuration object

```
#include <rc.h>
```

### 7.6.1 Detailed Description

resource configuration object

Attributes description:

- `nocleanup` don't perform memory cleanup in log4c library destructor or in `log4c_fini()` (p. 43)
- `bufsize` maximum logging buffer size. 0 for no limits
- `debug` activate log4c debugging

The documentation for this struct was generated from the following file:

- **rc.h**

## 7.7 log4c\_rollingpolicy\_type Struct Reference

log4c rollingpolicy type. Defines the interface a specific policy must provide to the rolling-file appender.

```
#include <rollingpolicy.h>
```

### 7.7.1 Detailed Description

log4c rollingpolicy type. Defines the interface a specific policy must provide to the rolling-file appender.

Attributes description:

- `name` rollingpolicy type name
- `init()` init the rollingpolicy
- `is_triggering_event()`
- `rollover()`

The documentation for this struct was generated from the following file:


- **rollingpolicy.h**

## 8 File Documentation


### 8.1 appender.h File Reference

Implement this interface for your own strategies for printing log statements.

```
#include <log4c/defs.h> #include <log4c/layout.h> #include
<stdio.h> Include dependency graph for appender.h:
```

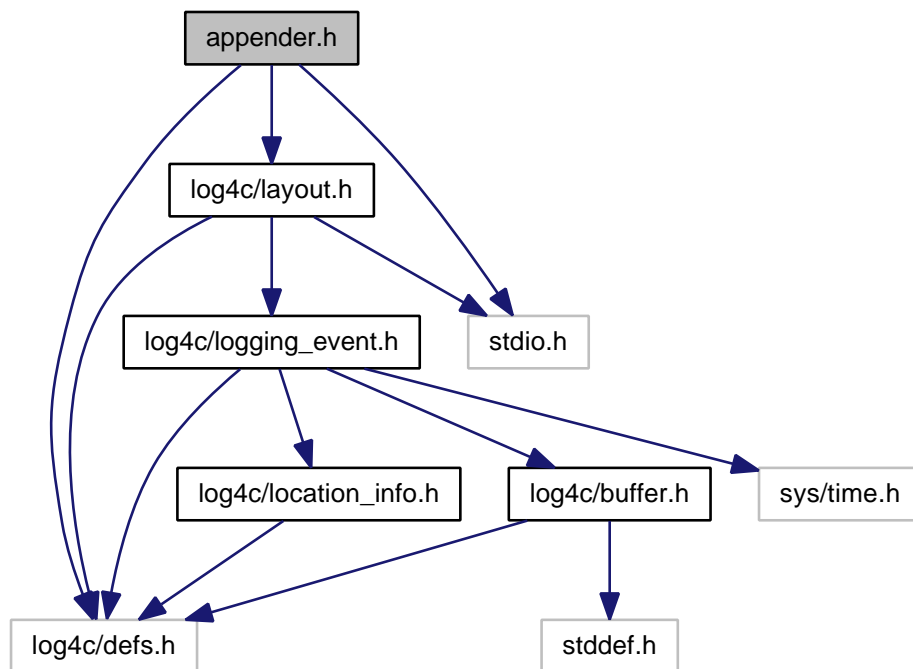

This graph shows which files directly or indirectly include this file:



#### Data Structures

- struct **log4c\_appender\_type**  
*log4c appender type class*

#### Defines

- #define **log4c\_appender\_type\_define**(a\_type)

### Typedefs

- typedef struct \_\_log4c\_appender **log4c\_appender\_t**
- typedef struct **log4c\_appender\_type** **log4c\_appender\_type\_t**  
*log4c appender type class*

### Functions

- LOG4C\_API const **log4c\_appender\_type\_t** \* **log4c\_appender\_type\_get** (const char \*a\_name)
- LOG4C\_API const **log4c\_appender\_type\_t** \* **log4c\_appender\_type\_set** (const **log4c\_appender\_type\_t** \*a\_type)
- LOG4C\_API **log4c\_appender\_t** \* **log4c\_appender\_get** (const char \*a\_name)
- LOG4C\_API **log4c\_appender\_t** \* **log4c\_appender\_new** (const char \*a\_name)
- LOG4C\_API void **log4c\_appender\_delete** (**log4c\_appender\_t** \*a\_appender)
- LOG4C\_API const char \* **log4c\_appender\_get\_name** (const **log4c\_appender\_t** \*a\_appender)
- LOG4C\_API const **log4c\_appender\_type\_t** \* **log4c\_appender\_get\_type** (const **log4c\_appender\_t** \*a\_appender)
- LOG4C\_API const **log4c\_layout\_t** \* **log4c\_appender\_get\_layout** (const **log4c\_appender\_t** \*a\_appender)
- LOG4C\_API void \* **log4c\_appender\_get\_udata** (const **log4c\_appender\_t** \*a\_appender)
- LOG4C\_API const **log4c\_appender\_type\_t** \* **log4c\_appender\_set\_type** (**log4c\_appender\_t** \*a\_appender, const **log4c\_appender\_type\_t** \*a\_type)
- LOG4C\_API void \* **log4c\_appender\_set\_udata** (**log4c\_appender\_t** \*a\_appender, void \*a\_udata)
- LOG4C\_API const **log4c\_layout\_t** \* **log4c\_appender\_set\_layout** (**log4c\_appender\_t** \*a\_appender, const **log4c\_layout\_t** \*a\_layout)
- LOG4C\_API int **log4c\_appender\_open** (**log4c\_appender\_t** \*a\_appender)
- LOG4C\_API int **log4c\_appender\_append** (**log4c\_appender\_t** \*a\_appender, **log4c\_logging\_event\_t** \*a\_event)
- LOG4C\_API int **log4c\_appender\_close** (**log4c\_appender\_t** \*a\_appender)
- LOG4C\_API void **log4c\_appender\_print** (const **log4c\_appender\_t** \*a\_appender, FILE \*a\_stream)
- LOG4C\_API void **log4c\_appender\_types\_print** (FILE \*fp)

#### 8.1.1 Detailed Description

Implement this interface for your own strategies for printing log statements.

**Todo** the appender interface needs a better configuration system depending on the layout type. The udata field is a just a trick.

### 8.1.2 Define Documentation

#### 8.1.2.1 #define log4c\_appender\_type\_define( *a\_type* )

Helper macro to define static appender types.

##### Parameters

<i>a_type</i>	the log4c_appender_type_t object to define
---------------	--

##### Warning

needs GCC support: otherwise this macro does nothing

**Deprecated** This macro, and the static initialization of appenders in general, is deprecated. Use rather the **log4c\_appender\_type\_set()** (p. 18) function to initialize your appenders before calling **log4c\_init()** (p. 43)

### 8.1.3 Typedef Documentation

#### 8.1.3.1 typedef struct \_log4c\_appender log4c\_appender\_t

log4c appender class

#### 8.1.3.2 typedef struct log4c\_appender\_type log4c\_appender\_type\_t

log4c appender type class

Attributes description:

- name appender type name
- open
- append
- close

### 8.1.4 Function Documentation

#### 8.1.4.1 LOG4C\_API int log4c\_appender\_append ( log4c\_appender\_t \* *this*, log4c\_logging\_event\_t \* *a\_event* )

log in appender specific way.

##### Parameters

<i>a_appender</i>	the log4c_appender object
<i>a_event</i>	the <b>log4c_logging_event_t</b> (p. 10) object to log.

**Bug** is this the right place to open an appender ?

8.1.4.2 LOG4C\_API int log4c\_appender\_close ( log4c\_appender\_t \* *a\_appender* )

closes the appender

Parameters

<i>a_appender</i>	the log4c_appender_t object
-------------------	-----------------------------

Returns

zero if successful, -1 otherwise

8.1.4.3 LOG4C\_API void log4c\_appender\_delete ( log4c\_appender\_t \* *a\_appender* )

Destructor for log4c\_appender\_t.

8.1.4.4 LOG4C\_API log4c\_appender\_t\* log4c\_appender\_get ( const char \* *a\_name* )

Get a pointer to an existing appender.

Parameters

<i>a_name</i>	the name of the appender to return.
---------------	-------------------------------------

Returns

a pointer to an existing appender, or NULL if no appender with the specified name exists.

8.1.4.5 LOG4C\_API const log4c\_layout\_t\* log4c\_appender\_get\_layout ( const log4c\_appender\_t \* *a\_appender* )

Parameters

<i>a_appender</i>	the log4c_appender_t object
-------------------	-----------------------------

Returns

the appender layout

8.1.4.6 LOG4C\_API const char\* log4c\_appender\_get\_name ( const log4c\_appender\_t \* *a\_appender* )

Parameters

<i>a_appender</i>	the log4c_appender_t object
-------------------	-----------------------------

## Returns

the appender name

8.1.4.7 LOG4C\_API const log4c\_appender\_type\_t\* log4c\_appender\_get\_type ( const log4c\_appender\_t\* *a\_appender* )

## Parameters

<i>a_appender</i>	the log4c_appender_t object
-------------------	-----------------------------

## Returns

the appender operations

8.1.4.8 LOG4C\_API void\* log4c\_appender\_get\_udata ( const log4c\_appender\_t\* *a\_appender* )

## Parameters

<i>a_appender</i>	the log4c_appender_t object
-------------------	-----------------------------

## Returns

the appender user data

8.1.4.9 LOG4C\_API log4c\_appender\_t\* log4c\_appender\_new ( const char \* *a\_name* )

Constructor for log4c\_appender\_t.

8.1.4.10 LOG4C\_API int log4c\_appender\_open ( log4c\_appender\_t\* *a\_appender* )

opens the appender.

## Parameters

<i>a_appender</i>	the log4c_appender_t object
-------------------	-----------------------------

8.1.4.11 LOG4C\_API void log4c\_appender\_print ( const log4c\_appender\_t\* *a\_appender*, FILE \* *a\_stream* )

prints the appender on a stream

## Parameters

<i>a_appender</i>	the log4c_appender_t object
<i>a_stream</i>	the stream

8.1.4.12 LOG4C\_API const log4c\_layout\_t\* log4c\_appender\_set\_layout (   
 log4c\_appender\_t \* *a\_appender*, const log4c\_layout\_t \* *a\_layout* )

sets the appender layout

Parameters

<i>a_appender</i>	the log4c_appender_t object
<i>a_layout</i>	the new appender layout

Returns

the previous appender layout

8.1.4.13 LOG4C\_API const log4c\_appender\_type\_t\* log4c\_appender\_set\_type (   
 log4c\_appender\_t \* *a\_appender*, const log4c\_appender\_type\_t \* *a\_type* )

sets the appender type

Parameters

<i>a_appender</i>	the log4c_appender_t object
<i>a_type</i>	the new appender type

Returns

the previous appender type

8.1.4.14 LOG4C\_API void\* log4c\_appender\_set\_udata ( log4c\_appender\_t \* *a\_appender*,   
 void \* *a\_udata* )

sets the appender user data

Parameters

<i>a_appender</i>	the log4c_appender_t object
<i>a_udata</i>	the new appender user data

Returns

the previous appender user data

8.1.4.15 LOG4C\_API const log4c\_appender\_type\_t\* log4c\_appender\_type\_get ( const char   
 \* *a\_name* )

Get a pointer to an existing appender type.

## Parameters

<i>a_name</i>	the name of the appender type to return.
---------------	--

## Returns

a pointer to an existing appender type, or NULL if no appender type with the specified name exists.

#### 8.1.4.16 LOG4C\_API const log4c\_appender\_type\_t\* log4c\_appender\_type\_set ( const log4c\_appender\_type\_t\* *a\_type* )

Use this function to register an appender type with log4c. Once this is done you may refer to this type by name both programmatically and in the log4c configuration file.

## Parameters

<i>a_type</i>	a pointer to the new appender type to set.
---------------	--

## Returns

a pointer to the previous appender type of same name.

Example code fragment:

```
const log4c_appender_type_t log4c_appender_type_s13_file = {
    "s13_file",
    s13_file_open,
    s13_file_append,
    s13_file_close,
};

log4c_appender_type_set(&log4c_appender_type_s13_file);
```

#### 8.1.4.17 LOG4C\_API void log4c\_appender\_types\_print ( FILE \* *fp* )

prints all the current registered appender types on a stream


## Parameters

<i>fp</i>	the stream
-----------	------------

## 8.2 appender\_type\_mmap.h File Reference

Log4c mmap(2) appender interface.

#include <log4c/defs.h> #include <log4c/appender.h> Include dependency graph for appender\_type\_mmap.h:

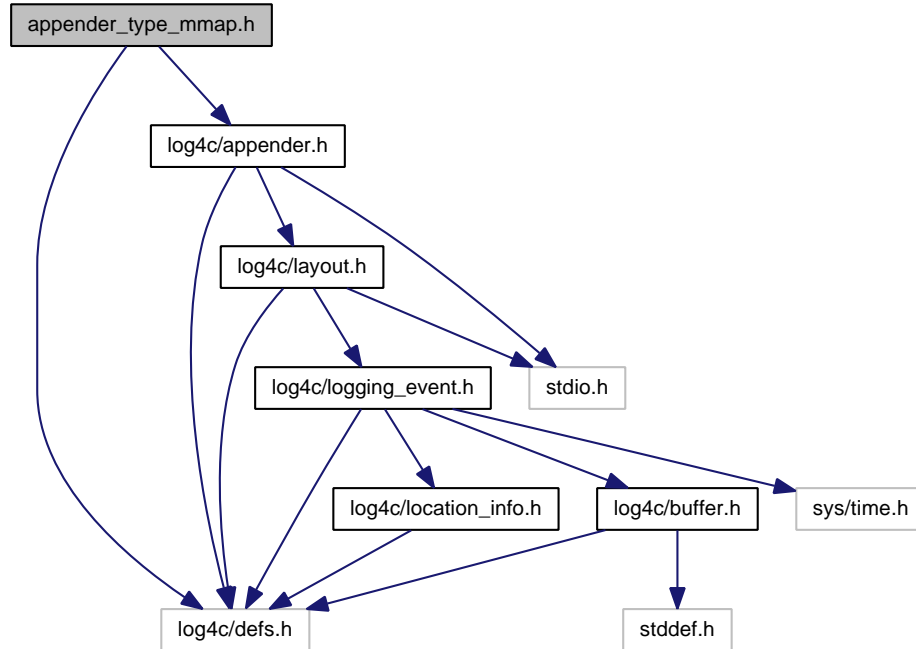

#### Variables

- `__LOG4C_BEGIN_DECLS` const **log4c\_appender\_type\_t** **log4c\_appender\_type\_mmap**

#### 8.2.1 Detailed Description

Log4c mmap(2) appender interface. The mmap appender uses a fixed length memory mapped file for logging. The appender's name is used as the file name which will be opened and mapped to memory at first use. The memory mapped file is then used as a rotating buffer in which logging events are written.

The following examples shows how to define and use mmap appenders.

```
log4c_appender_t* myappender;

myappender = log4c_appender_get("myfile.log");
log4c_appender_set_type(myappender, &log4c_appender_type_mmap);
```

#### Warning

the file is not created at first use. It should already exist and have a reasonable size, a mutiple of a page size.

## 8.2.2 Variable Documentation

8.2.2.1 `_LOG4C_BEGIN_DECLS` `const log4c_appender_type_t`  
`log4c_appender_type_mmap`


Mmap appender type definition.

This should be used as a parameter to the `log4c_appender_set_type()` (p. 17) routine to set the type of the appender.

## 8.3 appender\_type\_rollingfile.h File Reference

Log4c rolling file appender interface.

```
#include <log4c/defs.h>      #include <log4c/appender.h> ×
#include <log4c/rollingpolicy.h> Include dependency graph for
appender_type_rollingfile.h:
```

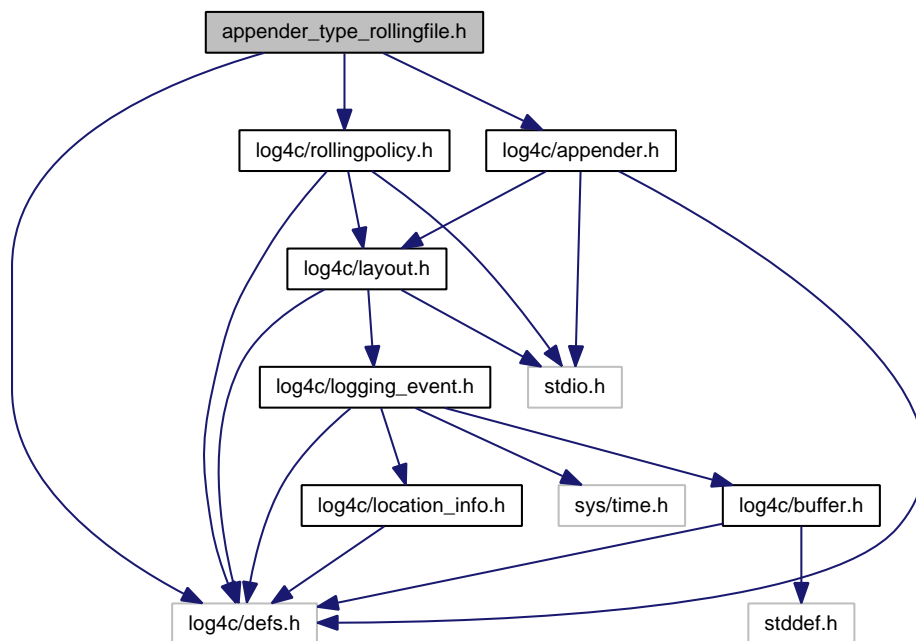

## Functions

- LOG4C\_API `rollingfile_udata_t *` **rollingfile\_make\_udata** (void)
- LOG4C\_API `int` **rollingfile\_udata\_set\_logdir** (`rollingfile_udata_t *``rfudatap`, `char *``logdir`)
- LOG4C\_API `int` **rollingfile\_udata\_set\_files\_prefix** (`rollingfile_udata_t *``rfudatap`, `char *``prefix`)
- LOG4C\_API `int` **rollingfile\_udata\_set\_policy** (`rollingfile_udata_t *``rfudatap`, `log4c_rollingpolicy_t *``polycyp`)

- LOG4C\_API const char \* **rollingfile\_udata\_get\_logdir** (rollingfile\_udata\_t \*rfudatap)
- LOG4C\_API const char \* **rollingfile\_udata\_get\_files\_prefix** (rollingfile\_udata\_t \*rfudatap)
- LOG4C\_API long **rollingfile\_get\_current\_file\_size** (rollingfile\_udata\_t \*rfudatap)

#### Variables

- **\_\_LOG4C\_BEGIN\_DECLS** LOG4C\_API const **log4c\_appender\_type\_t** **log4c\_appender\_type\_rollingfile**

#### 8.3.1 Detailed Description

Log4c rolling file appender interface. The rolling file appender implements a logging mechanism of a list of files up to a maximum number.

The files are written by default to the current directory with logging names following the pattern log.1, log.2 etc. These parameters may be changed using the appropriate setter functions.

If the appender fails to open logfiles for writing then the messages are logged to stderr--it will continue to try to open the zero-th file for writing at rollover events so if it succeeds at some point to open that file the messages will start to appear therein and will no longer be sent to stderr.

Switching from logging from one file to the next is referred to as a 'rollover event'.

The policy that determines when a rollover event should happen is called a 'rolling policy'.

A mechanism is provided to allow different rolling policies to be defined.

Log4c ships with (and defaults to) the classic size-window rollover policy: this triggers rollover when files reach a maximum size. The first file in the list is always the current file; when a rollover event occurs files are shifted up by one position in the list--if the number of files in the list has already reached the max then the oldest file is rotated out of the window.

See the documentation in the **rollingpolicy\_type\_sizewin.h** (p. 65) file for more details on the size-win rollover policy.

#### 8.3.2 Function Documentation

##### 8.3.2.1 LOG4C\_API long rollingfile\_get\_current\_file\_size ( rollingfile\_udata\_t \* rfudatap )

Get the prefix string in this rolling file appender configuration.

#### Parameters

<i>rfudatap</i>	the rolling file appender configuration object.
-----------------	---

## Returns

the current size of the file being logged to.

## 8.3.2.2 LOG4C\_API rollingfile\_uda\_t\* rollingfile\_make\_uda ( void )

Get a new rolling file appender configuration object.

## Returns

a new rolling file appender configuration object, otherwise NULL.

## 8.3.2.3 LOG4C\_API const char\* rollingfile\_uda\_get\_files\_prefix ( rollingfile\_uda\_t \* rfudatap )

Get the prefix string in this rolling file appender configuration.

## Parameters

<i>rfudatap</i>	the rolling file appender configuration object.
-----------------	---

## Returns

the prefix.

## 8.3.2.4 LOG4C\_API const char\* rollingfile\_uda\_get\_logdir ( rollingfile\_uda\_t \* rfudatap )

Get the logging directory in this rolling file appender configuration.

## Parameters

<i>rfudatap</i>	the rolling file appender configuration object.
-----------------	---

## Returns

the logging directory.

## 8.3.2.5 LOG4C\_API int rollingfile\_uda\_set\_files\_prefix ( rollingfile\_uda\_t \* rfudatap, char \* prefix )

Set the prefix string in this rolling file appender configuration.

## Parameters

<i>rfudatap</i>	the rolling file appender configuration object.
<i>prefix</i>	the logging files prefix to use.

## Returns

zero if successful, non-zero otherwise.

8.3.2.6 LOG4C\_API int rollingfile\_uda<sub>t</sub>.set\_logdir ( rollingfile\_uda<sub>t</sub> \* rfudatap, char \* logdir )

Set the logging directory in this rolling file appender configuration.

## Parameters

<i>rfudatap</i>	the rolling file appender configuration object.
<i>logdir</i>	the logging directory to set.

## Returns

zero if successful, non-zero otherwise.

8.3.2.7 LOG4C\_API int rollingfile\_uda<sub>t</sub>.set\_policy ( rollingfile\_uda<sub>t</sub> \* rfudatap, log4c\_rollingpolicy\_t \* policyp )

Set the rolling policy in this rolling file appender configuration.

## Parameters

<i>rfudatap</i>	the rolling file appender configuration object.
<i>policyp</i>	the logging files prfix to use.

## Returns

zero if successful, non-zero otherwise.

## 8.3.3 Variable Documentation

## 8.3.3.1 \_LOG4C\_BEGIN\_DECLS LOG4C\_API const log4c\_appender\_type\_t log4c\_appender\_type\_rollingfile


rollingfile appender type definition.

This should be used as a parameter to the **log4c\_appender\_set\_type()** (p. 17) routine to set the type of the appender.

## 8.4 appender\_type\_stream.h File Reference

Log4c stream appender interface.

#include <log4c/defs.h> #include <log4c/appender.h> Include dependency graph for appender\_type\_stream.h:

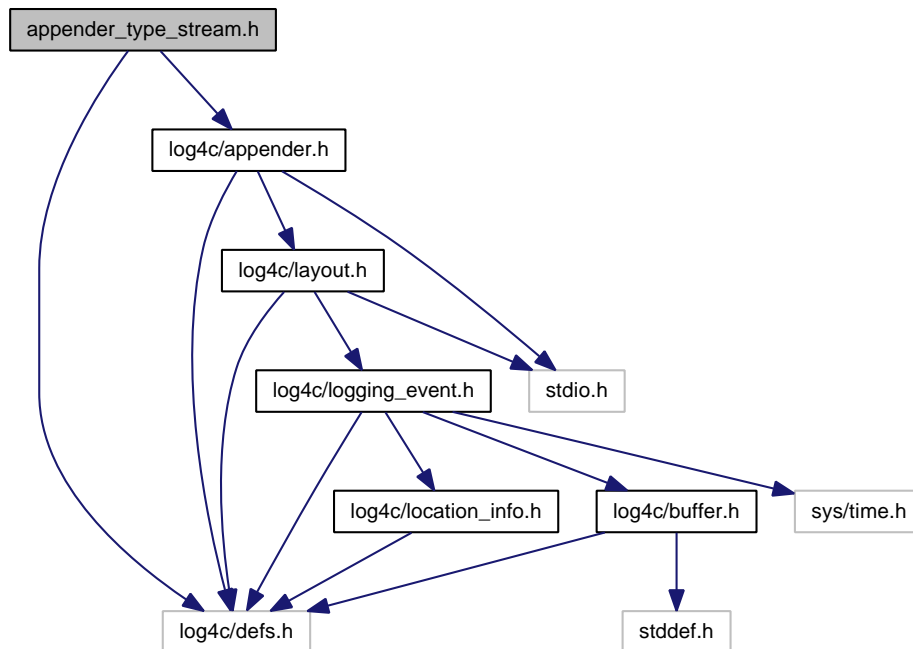

#### Variables

- `__LOG4C_BEGIN_DECLS` const **log4c\_appender\_type\_t** **log4c\_appender\_type\_stream**

#### 8.4.1 Detailed Description

Log4c stream appender interface. The stream appender uses a file handle `FILE*` for logging. The appender's name is used as the file name which will be opened at first log. An appender can also be associated to an opened file handle using the **log4c\_appender\_set\_udata()** (p. 17) method to update the appender user data field. In this last case, the appender name has no meaning. 2 default stream appenders are defined: "stdout" and "stderr".

The following examples shows how to define and use stream appenders.

- the simple way

```

log4c_appender_t* myappender;

myappender = log4c_appender_get("myfile.log");
log4c_appender_set_type(myappender, &log4c_appender_type_stream);
  
```

- the sophisticated way

```

log4c_appender_t* myappender;

myappender = log4c_appender_get("myappender");

log4c_appender_set_type(myappender, &log4c_appender_type_stream);
log4c_appender_set_udata(myappender, fopen("myfile.log", "w"));

```

### 8.4.2 Variable Documentation

#### 8.4.2.1 `_LOG4C_BEGIN_DECLS` const `log4c_appender_type_t` `log4c_appender_type_stream`


Stream appender type definition.

This should be used as a parameter to the `log4c_appender_set_type()` (p. 17) routine to set the type of the appender.

### 8.5 appender\_type\_stream2.h File Reference

Log4c stream2 appender interface.

`#include <log4c/defs.h> #include <log4c/appender.h>` Include dependency graph for `appender_type_stream2.h`:

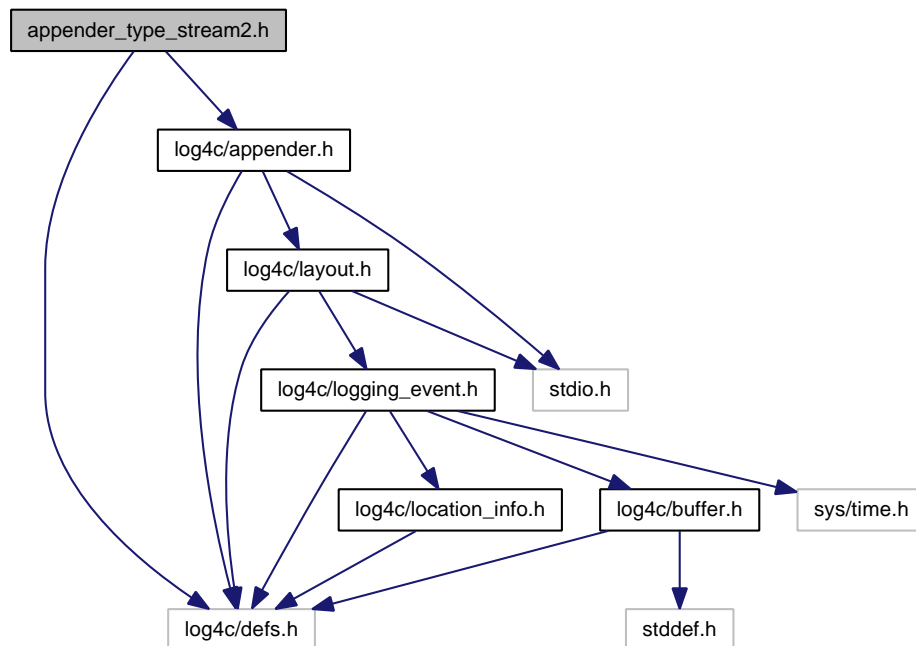

### Functions

- LOG4C\_API void **log4c\_stream2\_set\_fp**(`log4c_appender_t`\*a\_this, FILE \*fp)

- LOG4C\_API FILE \* **log4c\_stream2\_get\_fp** (log4c\_appender\_t \*a\_this)
- LOG4C\_API void **log4c\_stream2\_set\_flags** (log4c\_appender\_t \*a\_this, int flags)
- LOG4C\_API int **log4c\_stream2\_get\_flags** (log4c\_appender\_t \*a\_this)

#### Variables

- **\_\_LOG4C\_BEGIN\_DECLS** LOG4C\_API const **log4c\_appender\_type\_t** **log4c\_appender\_type\_stream2**

#### 8.5.1 Detailed Description

Log4c stream2 appender interface. The stream2 appender uses a file handle FILE\* for logging. It can be used with stdout, stderr or a normal file. It is pretty primitive as it does not do file rotation, or have a maximum configurable file size etc. It improves on the stream appender in a few ways that make it a better starting point for new stream based appenders.

It enhances the stream appender by allowing the default file pointer to be used in buffered or unbuffered mode. Also when you set the file pointer stream2 will not attempt to close it on exit which avoids it fighting with the owner of the file pointer. stream2 is configured via setter functions--the udata is not exposed directly. This means that new options (eg. configure the open mode ) could be added to stream2 while maintaining backward compatability.

The appender can be used with default values, for example as follows:

```
log4c_appender_t* myappender;

myappender = log4c_appender_get("/var/logs/mylog.log");
log4c_appender_set_type(myappender, log4c_appender_type_get("stream2"));
```

In this case the appender will be configured automatically with default values:

- the filename is the same as the name of the appender, "/var/logs/mymlog.log"
- the file is opened in "w+" mode
- the default system buffer is used (cf; setbuf ( ) ) in buffered mode

The stream2 appender can be configured by passing it a file pointer to use. In this case you manage the file pointer yourself--open, option setting, closing. If you set the file pointer log4c will not close the file on exiting--you must do this:

```
log4c_appender_t* myappender;
FILE * fp = fopen("myfile.log", "w");

myappender = log4c_appender_get("myappender");
log4c_appender_set_type(myappender, log4c_appender_type_get("stream2"));
log4c_stream2_set_fp(stream2_appender, myfp);
```

The default file pointer can be configured to use unbuffered mode. Buffered mode is typically 25%-50% faster than unbuffered mode but unbuffered mode is useful if your preference is for a more synchronized log file :

```
log4c_appender_t* myappender;  
  
myappender = log4c_appender_get("/var/logs/mylog.log");  
log4c_appender_set_type(myappender, log4c_appender_type_get("stream2"));  
log4c_stream2_set_flags(myappender, LOG4C_STREAM2_UNBUFFERED);
```

## 8.5.2 Function Documentation

### 8.5.2.1 LOG4C\_API int log4c\_stream2\_get\_flags ( log4c\_appender\_t \* a\_this )

Get the flags for this appender.

#### Parameters

<i>this</i>	a pointer to the appender
-------------	---------------------------

#### Returns

the flags for this appender. returns -1 if there was a problem.

### 8.5.2.2 LOG4C\_API FILE\* log4c\_stream2\_get\_fp ( log4c\_appender\_t \* a\_this )

Get the file pointer for this appender.

#### Parameters

<i>this</i>	a pointer to the appender
-------------	---------------------------

#### Returns

the file pointer for this appender. If there's a problem returns NULL.

### 8.5.2.3 LOG4C\_API void log4c\_stream2\_set\_flags ( log4c\_appender\_t \* a\_this, int flags )

Set the flags for this appender.

#### Parameters

<i>this</i>	a pointer to the appender
<i>flags</i>	are the flags to set. These will overwrite the existing flags. Currently supported flags: LOG4C_STREAM2_UNBUFFERED

### 8.5.2.4 LOG4C\_API void log4c\_stream2\_set\_fp ( log4c\_appender\_t \* a\_this, FILE \* fp )

Set the file pointer for this appender.

## Parameters

<i>this</i>	a pointer to the appender
<i>fp</i>	the file pointer this appender will use. The caller is responsible for managing the file pointer (open, option setting, closing).

## 8.5.3 Variable Documentation

8.5.3.1 `_LOG4C_BEGIN_DECLS LOG4C_API const log4c_appender_type_t log4c_appender_type_stream2`


Stream2 appender type definition.

This should be used as a parameter to the `log4c_appender_set_type()` (p. 17) routine to set the type of the appender.

## 8.6 appender\_type\_syslog.h File Reference

Log4c syslog(3) appender interface.

`#include <log4c/defs.h> #include <log4c/appender.h>` Include dependency graph for `appender_type_syslog.h`:

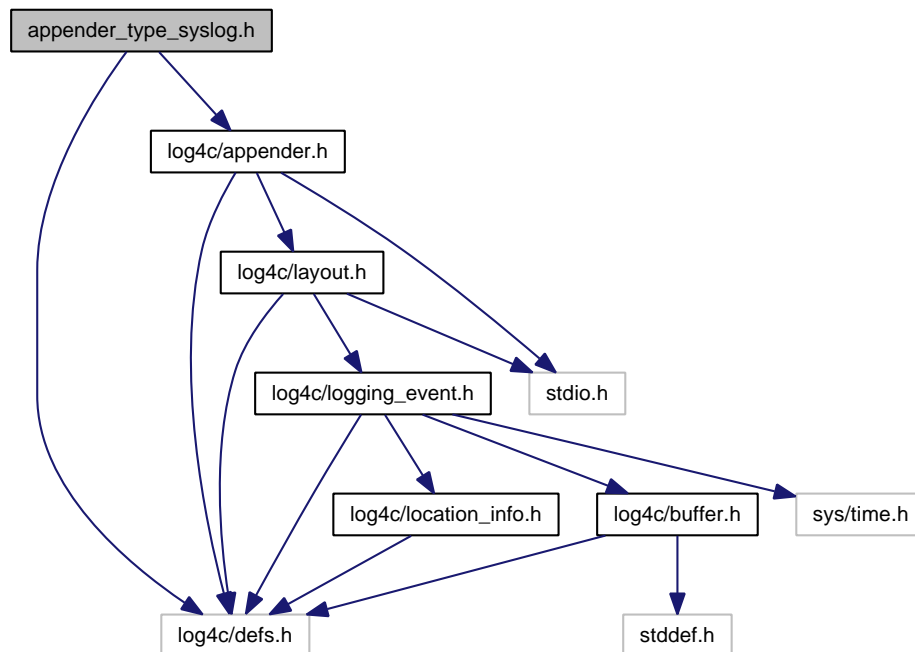

## Variables

- `__LOG4C_BEGIN_DECLS` const `log4c_appender_type_t` `log4c_appender_type_syslog`

## 8.6.1 Detailed Description

Log4c syslog(3) appender interface. The syslog appender uses the syslog(3) interface for logging. The log4c priorities are mapped to the syslog priorities and the appender name is used as a syslog identifier. 1 default syslog appender is defined: "syslog".

The following examples shows how to define and use syslog appenders.

```
log4c_appender_t* myappender;  
  
myappender = log4c_appender_get("myappender");  
log4c_appender_set_type(myappender, &log4c_appender_type_syslog);
```

## 8.6.2 Variable Documentation

8.6.2.1 `__LOG4C_BEGIN_DECLS` const `log4c_appender_type_t`  
`log4c_appender_type_syslog`


Syslog appender type definition.

This should be used as a parameter to the `log4c_appender_set_type()` (p. 17) routine to set the type of the appender.


## 8.7 buffer.h File Reference

log4c buffer

`#include <log4c/defs.h> #include <stddef.h>` Include dependency graph for buffer.h:

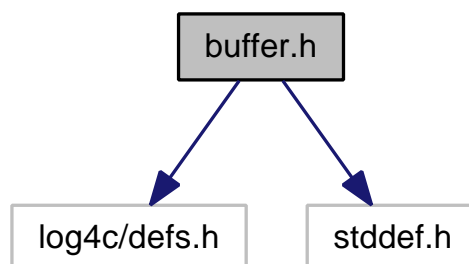

This graph shows which files directly or indirectly include this file:

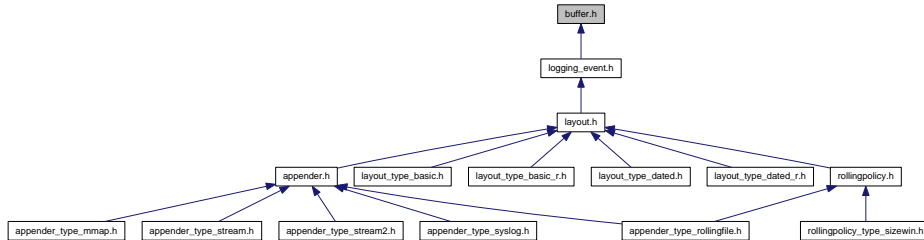

### Data Structures

- struct **log4c\_buffer\_t**  
*buffer object*


#### 8.7.1 Detailed Description

log4c buffer

### 8.8 category.h File Reference

central class in the log4c package.

```
#include <stdio.h> #include <stdarg.h> #include <log4c/defs.h>
#include <log4c/priority.h> #include <log4c/location_info.h>
Include dependency graph for category.h:
```

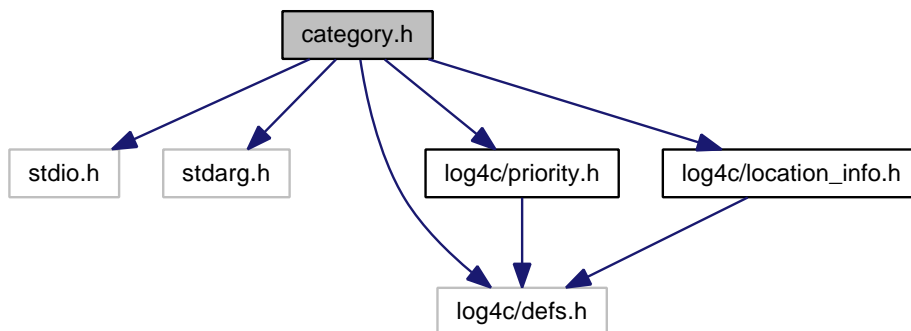

### Defines

- #define **log4c\_category\_define**(a\_category, a\_name)

### Typedefs

- typedef struct \_\_log4c\_category **log4c\_category\_t**

### Functions

- LOG4C\_API **log4c\_category\_t** \* **log4c\_category\_get** (const char \*a\_name)
- LOG4C\_API int **log4c\_category\_list** (**log4c\_category\_t** \*\*a\_cats, int a\_ncats)
- LOG4C\_API **log4c\_category\_t** \* **log4c\_category\_new** (const char \*a\_name)
- LOG4C\_API void **log4c\_category\_delete** (**log4c\_category\_t** \*a\_category)
- LOG4C\_API const char \* **log4c\_category\_get\_name** (const **log4c\_category\_t** \*a\_category)
- LOG4C\_API struct \_\_log4c\_appender \* **log4c\_category\_get\_appender** (const **log4c\_category\_t** \*a\_category)
- LOG4C\_API int **log4c\_category\_get\_additivity** (const **log4c\_category\_t** \*a\_category)
- LOG4C\_API int **log4c\_category\_get\_priority** (const **log4c\_category\_t** \*a\_category)
- LOG4C\_API int **log4c\_category\_get\_chainedpriority** (const **log4c\_category\_t** \*a\_category)
- LOG4C\_API struct \_\_log4c\_appender \* **log4c\_category\_set\_appender** (**log4c\_category\_t** \*a\_category, struct \_\_log4c\_appender \*a\_appender)
- LOG4C\_API int **log4c\_category\_set\_priority** (**log4c\_category\_t** \*a\_category, int a\_priority)
- LOG4C\_API int **log4c\_category\_set\_additivity** (**log4c\_category\_t** \*a\_category, int a\_additivity)
- LOG4C\_API void **log4c\_category\_print** (const **log4c\_category\_t** \*a\_category, FILE \*a\_stream)
- static int **log4c\_category\_is\_priority\_enabled** (const **log4c\_category\_t** \*a\_category, int a\_priority)
- static int **log4c\_category\_is\_fatal\_enabled** (const **log4c\_category\_t** \*a\_category)
- static int **log4c\_category\_is\_alert\_enabled** (const **log4c\_category\_t** \*a\_category)
- static int **log4c\_category\_is\_crit\_enabled** (const **log4c\_category\_t** \*a\_category)
- static int **log4c\_category\_is\_error\_enabled** (const **log4c\_category\_t** \*a\_category)
- static int **log4c\_category\_is\_warn\_enabled** (const **log4c\_category\_t** \*a\_category)
- static int **log4c\_category\_is\_notice\_enabled** (const **log4c\_category\_t** \*a\_category)
- static int **log4c\_category\_is\_info\_enabled** (const **log4c\_category\_t** \*a\_category)
- static int **log4c\_category\_is\_debug\_enabled** (const **log4c\_category\_t** \*a\_category)
- static int **log4c\_category\_is\_trace\_enabled** (const **log4c\_category\_t** \*a\_category)

- static LOG4C\_INLINE void **log4c\_category\_log** (const **log4c\_category\_t** \*a\_category, int a\_priority, const char \*a\_format,...)
- static LOG4C\_INLINE void **log4c\_category\_log\_locinfo** (const **log4c\_category\_t** \*a\_category, const **log4c\_location\_info\_t** \*a\_locinfo, int a\_priority, const char \*a\_format,...)
- static LOG4C\_INLINE void **log4c\_category\_fatal** (const **log4c\_category\_t** \*a\_category, const char \*a\_format,...)
- static LOG4C\_INLINE void **log4c\_category\_alert** (const **log4c\_category\_t** \*a\_category, const char \*a\_format,...)
- static LOG4C\_INLINE void **log4c\_category\_crit** (const **log4c\_category\_t** \*a\_category, const char \*a\_format,...)
- static LOG4C\_INLINE void **log4c\_category\_error** (const **log4c\_category\_t** \*a\_category, const char \*a\_format,...)
- static LOG4C\_INLINE void **log4c\_category\_warn** (const **log4c\_category\_t** \*a\_category, const char \*a\_format,...)
- static LOG4C\_INLINE void **log4c\_category\_notice** (const **log4c\_category\_t** \*a\_category, const char \*a\_format,...)
- static LOG4C\_INLINE void **log4c\_category\_info** (const **log4c\_category\_t** \*a\_category, const char \*a\_format,...)
- static LOG4C\_INLINE void **log4c\_category\_debug** (const **log4c\_category\_t** \*a\_category, const char \*a\_format,...)
- static LOG4C\_INLINE void **\_\_log4c\_category\_trace** (const **log4c\_category\_t** \*a\_category, const char \*a\_format,...)

### 8.8.1 Detailed Description

central class in the log4c package. One of the distinctive features of log4j (and hence log4c) are hierarchical categories and their evaluation.

### 8.8.2 Define Documentation

#### 8.8.2.1 `#define log4c_category_define( a_category, a_name )`

Helper macro to define static categories.

#### Parameters

<i>a_category</i>	the log4c_category_t pointer name
<i>a_name</i>	the category name

### 8.8.3 Typedef Documentation

#### 8.8.3.1 `typedef struct _log4c_category log4c_category_t`

log4c category class

## 8.8.4 Function Documentation

8.8.4.1 static LOG4C\_INLINE void \_\_log4c\_category\_trace ( const log4c\_category\_t\*  
a\_category, const char \* a\_format, ... ) [static]

Log a message with trace priority.

## Parameters

a_category	the log4c_category_t object
a_format	Format specifier for the string to write in the log file.
...	The arguments for a_format

References log4c\_category\_is\_priority\_enabled(), and LOG4C\_PRIORITY\_TRACE.

8.8.4.2 static LOG4C\_INLINE void log4c\_category\_alert ( const log4c\_category\_t\*  
a\_category, const char \* a\_format, ... ) [static]

Log a message with alert priority.

## Parameters

a_category	the log4c_category_t object
a_format	Format specifier for the string to write in the log file.
...	The arguments for a_format

References log4c\_category\_is\_priority\_enabled(), and LOG4C\_PRIORITY\_ALERT.

8.8.4.3 static LOG4C\_INLINE void log4c\_category\_crit ( const log4c\_category\_t\* a\_category,  
const char \* a\_format, ... ) [static]

Log a message with crit priority.

## Parameters

a_category	the log4c_category_t object
a_format	Format specifier for the string to write in the log file.
...	The arguments for a_format

References log4c\_category\_is\_priority\_enabled(), and LOG4C\_PRIORITY\_CRIT.

8.8.4.4 static LOG4C\_INLINE void log4c\_category\_debug ( const log4c\_category\_t\*  
a\_category, const char \* a\_format, ... ) [static]

Log a message with debug priority.

## Parameters

a_category	the log4c_category_t object
a_format	Format specifier for the string to write in the log file.
...	The arguments for a_format

References `log4c_category_is_priority_enabled()`, and `LOG4C_PRIORITY_DEBUG`.

#### 8.8.4.5 LOG4C\_API void log4c\_category\_delete ( log4c\_category\_t\* *a\_category* )

Destructor for a `log4c_category_t`.

##### Parameters

<i>a_category</i>	the <code>log4c_category_t</code> object
-------------------	--

#### 8.8.4.6 static LOG4C\_INLINE void log4c\_category\_error ( const log4c\_category\_t\* *a\_category*, const char \* *a\_format*, ... ) [static]

Log a message with error priority.

##### Parameters

<i>a_category</i>	the <code>log4c_category_t</code> object
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for <i>a_format</i>

References `log4c_category_is_priority_enabled()`, and `LOG4C_PRIORITY_ERROR`.

#### 8.8.4.7 static LOG4C\_INLINE void log4c\_category\_fatal ( const log4c\_category\_t\* *a\_category*, const char \* *a\_format*, ... ) [static]

Log a message with fatal priority.

##### Parameters

<i>a_category</i>	the <code>log4c_category_t</code> object
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for <i>a_format</i>

References `log4c_category_is_priority_enabled()`, and `LOG4C_PRIORITY_FATAL`.

#### 8.8.4.8 LOG4C\_API log4c\_category\_t\* log4c\_category\_get ( const char \* *a\_name* )

Instantiate a `log4c_category_t` with name *name*. This method does not set priority of the category which is by default `LOG4C_PRIORITY_NOTSET`.

##### Parameters

<i>a_name</i>	The name of the category to retrieve.
---------------	---------------------------------------

**Bug** the root category name should be "" not "root". \*

#### 8.8.4.9 LOG4C\_API int log4c\_category\_get\_additivity ( const log4c\_category\_t\* *a\_category* )

Get the additivity flag for this `log4c_category_t`.

## Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

## Returns

the category additivity

**8.8.4.10** LOG4C\_API struct \_\_log4c\_appender\* log4c\_category\_get\_appender ( const log4c\_category\_t \* *a\_category* ) [read]

Returns the Appender for this log4c\_category\_t, or NULL if no Appender has been set.

## Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

## Returns

The Appender.

**8.8.4.11** LOG4C\_API int log4c\_category\_get\_chainedpriority ( const log4c\_category\_t \* *a\_category* )

Starting from this category, search the category hierarchy for a set priority and return it. Otherwise, return the priority of the root category.

## Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

**Todo** the log4c\_category\_t is designed so that this method executes as quickly as possible. It could even be faster if the set priority was propagated through the children hierarchy of a category.

References LOG4C\_PRIORITY\_NOTSET, and LOG4C\_PRIORITY\_UNKNOWN.

**8.8.4.12** LOG4C\_API const char\* log4c\_category\_get\_name ( const log4c\_category\_t \* *a\_category* )

Return the category name.

## Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

## Returns

the category name.

## 8.8.4.13 LOG4C\_API int log4c\_category\_get\_priority ( const log4c\_category\_t\* a\_category )

Returns the assigned Priority, if any, for this log4c\_category\_t.

## Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

## Returns

Priority - the assigned Priority, can be LOG4C\_PRIORITY\_NOTSET

References LOG4C\_PRIORITY\_UNKNOWN.

## 8.8.4.14 static LOG4C\_INLINE void log4c\_category\_info ( const log4c\_category\_t\* a\_category, const char\* a\_format, ... ) [static]

Log a message with info priority.

## Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for a_format

References log4c\_category\_is\_priority\_enabled(), and LOG4C\_PRIORITY\_INFO.

## 8.8.4.15 static int log4c\_category\_is\_alert\_enabled ( const log4c\_category\_t\* a\_category ) [inline, static]

Return true if the category will log messages with priority LOG4C\_PRIORITY\_ALERT.

## Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

## Returns

Whether the category will log.

References log4c\_category\_is\_priority\_enabled(), and LOG4C\_PRIORITY\_ALERT.

## 8.8.4.16 static int log4c\_category\_is\_crit\_enabled ( const log4c\_category\_t\* a\_category ) [inline, static]

Return true if the category will log messages with priority LOG4C\_PRIORITY\_CRIT.

## Parameters

<i>a_category</i>	the log4c_category_t object
-------------------	-----------------------------

**Returns**

Whether the category will log.

References `log4c_category_is_priority_enabled()`, and `LOG4C_PRIORITY_CRIT`.

**8.8.4.17** `static int log4c_category_is_debug_enabled ( const log4c_category_t* a_category )`  
[inline, static]

Return true if the category will log messages with priority `LOG4C_PRIORITY_DEBUG`.

**Parameters**

<code>a_category</code>	the <code>log4c_category_t</code> object
-------------------------	--

**Returns**

Whether the category will log.

References `log4c_category_is_priority_enabled()`, and `LOG4C_PRIORITY_DEBUG`.

**8.8.4.18** `static int log4c_category_is_error_enabled ( const log4c_category_t* a_category )`  
[inline, static]

Return true if the category will log messages with priority `LOG4C_PRIORITY_ERROR`.

**Parameters**

<code>a_category</code>	the <code>log4c_category_t</code> object
-------------------------	--

**Returns**

Whether the category will log.

References `log4c_category_is_priority_enabled()`, and `LOG4C_PRIORITY_ERROR`.

**8.8.4.19** `static int log4c_category_is_fatal_enabled ( const log4c_category_t* a_category )`  
[inline, static]

Return true if the category will log messages with priority `LOG4C_PRIORITY_FATAL`.

**Parameters**

<code>a_category</code>	the <code>log4c_category_t</code> object
-------------------------	--

## Returns

Whether the category will log.

References `log4c_category_is_priority_enabled()`, and `LOG4C_PRIORITY_FATAL`.

**8.8.4.20** `static int log4c_category_is_info_enabled ( const log4c_category_t * a_category )`  
`[inline, static]`

Return true if the category will log messages with priority `LOG4C_PRIORITY_INFO`.

## Parameters

<code>a_category</code>	the <code>log4c_category_t</code> object
-------------------------	--

## Returns

Whether the category will log.

References `log4c_category_is_priority_enabled()`, and `LOG4C_PRIORITY_INFO`.

**8.8.4.21** `static int log4c_category_is_notice_enabled ( const log4c_category_t * a_category )`  
`[inline, static]`

Return true if the category will log messages with priority `LOG4C_PRIORITY_NOTICE`.

## Parameters

<code>a_category</code>	the <code>log4c_category_t</code> object
-------------------------	--

## Returns

Whether the category will log.

References `log4c_category_is_priority_enabled()`, and `LOG4C_PRIORITY_NOTICE`.

**8.8.4.22** `static int log4c_category_is_priority_enabled ( const log4c_category_t * a_category,`  
`int a_priority ) [inline, static]`

Returns true if the chained priority of the `log4c_category_t` is equal to or higher than given priority.

## Parameters

<code>a_category</code>	the <code>log4c_category_t</code> object
<code>a_priority</code>	The priority to compare with.

## Returns

whether logging is enable for this priority.

**8.8.4.23** `static int log4c_category_is_trace_enabled ( const log4c_category_t* a_category )`  
`[inline, static]`

Return true if the category will log messages with priority LOG4C\_PRIORITY\_TRACE.

#### Parameters

<code>a_category</code>	the log4c_category_t object
-------------------------	-----------------------------

#### Returns

Whether the category will log.

References log4c\_category\_is\_priority\_enabled(), and LOG4C\_PRIORITY\_TRACE.

**8.8.4.24** `static int log4c_category_is_warn_enabled ( const log4c_category_t* a_category )`  
`[inline, static]`

Return true if the category will log messages with priority LOG4C\_PRIORITY\_WARN.

#### Parameters

<code>a_category</code>	the log4c_category_t object
-------------------------	-----------------------------

#### Returns

Whether the category will log.

References log4c\_category\_is\_priority\_enabled(), and LOG4C\_PRIORITY\_WARN.

**8.8.4.25** `LOG4C_API int log4c_category_list ( log4c_category_t** a_cats, int a_ncats )`

Fill in an array with the log4c categories.

#### Parameters

<code>a_cats</code>	array of categories that will be filled
<code>a_ncats</code>	number of categories in the array

#### Returns

-1 if it fails or the number of available categories in log4c.

**8.8.4.26** `static LOG4C_INLINE void log4c_category_log ( const log4c_category_t* a_category, int a_priority, const char* a_format, ... )`  
`[static]`

Log a message with the specified priority.

## Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_priority</i>	The priority of this log message.
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for a_format

References log4c\_category\_is\_priority\_enabled().

8.8.4.27 static LOG4C\_INLINE void log4c\_category\_log\_locinfo ( const log4c\_category\_t \* *a\_category*, const log4c\_location\_info\_t \* *a\_locinfo*, int *a\_priority*, const char \* *a\_format*, ... ) [static]

Log a message with the specified priority and a user location info.

## Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_locinfo</i>	a user location info
<i>a_priority</i>	The priority of this log message.
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for a_format

References log4c\_category\_is\_priority\_enabled().

8.8.4.28 LOG4C\_API log4c\_category\_t\* log4c\_category\_new ( const char \* *a\_name* )

Constructor for a log4c\_category\_t.

## Parameters

<i>a_name</i>	the category name
---------------	-------------------

## Returns

a log4c\_category object

## Warning

this method should not be called directly. You should use the **log4c\_category\_get()** (p. 34) method in order to preserve the categories hierarchy.

References LOG4C\_PRIORITY\_NOTSET.

8.8.4.29 static LOG4C\_INLINE void log4c\_category\_notice ( const log4c\_category\_t \* *a\_category*, const char \* *a\_format*, ... ) [static]

Log a message with notice priority.

## Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for a_format

References log4c\_category\_is\_priority\_enabled(), and LOG4C\_PRIORITY\_NOTICE.

**8.8.4.30 LOG4C\_API void log4c\_category\_print ( const log4c\_category\_t \* *a\_category*, FILE \* *a\_stream* )**

prints the log4c\_category\_t object on a stream

#### Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_stream</i>	The stream

**8.8.4.31 LOG4C\_API int log4c\_category\_set\_additivity ( log4c\_category\_t \* *a\_category*, int *a\_additivity* )**

Sets a new additivity flag for this category.

#### Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_additivity</i>	the new category additivity

#### Returns

the previous category additivity

**8.8.4.32 LOG4C\_API struct \_log4c\_appender\* log4c\_category\_set\_appender ( log4c\_category\_t \* *this*, log4c\_appender\_t \* *a\_appender* )** [read]

Sets a new appender for this category.

#### Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_appender</i>	the new category appender

#### Returns

the previous category appender

**Todo** need multiple appenders per category

8.8.4.33 LOG4C\_API int log4c\_category\_set\_priority ( log4c\_category\_t\* *a\_category*, int *a\_priority* )

Sets a new priority of this category.

#### Parameters

<i>a_category</i>	the log4c_category_t object
<i>a_priority</i>	the new priority to set. Use LOG4C_PRIORITY_NOTSET to let the category use its parents priority as effective priority.

#### Returns

the previous category priority

References LOG4C\_PRIORITY\_UNKNOWN.

8.8.4.34 static LOG4C\_INLINE void log4c\_category\_warn ( const log4c\_category\_t\* *a\_category*, const char \* *a\_format*, ... ) [static]

Log a message with warn priority.

#### Parameters


<i>a_category</i>	the log4c_category_t object
<i>a_format</i>	Format specifier for the string to write in the log file.
...	The arguments for <i>a_format</i>

References log4c\_category\_is\_priority\_enabled(), and LOG4C\_PRIORITY\_WARN.

## 8.9 init.h File Reference

log4c constructors and destructors

#include <log4c/defs.h> #include <stdio.h> Include dependency graph for init.h:

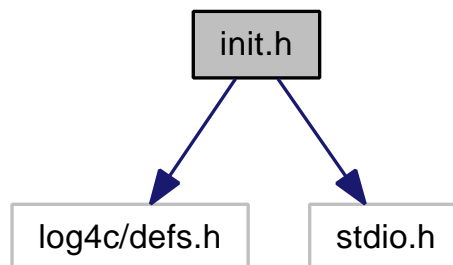

## Functions

- LOG4C\_API int **log4c\_init** (void)
- LOG4C\_API int **log4c\_fini** (void)

### 8.9.1 Detailed Description

log4c constructors and destructors

### 8.9.2 Function Documentation

#### 8.9.2.1 LOG4C\_API int log4c\_fini ( void )

destructor

#### Returns

0 for success

References log4c\_rc.

#### 8.9.2.2 LOG4C\_API int log4c\_init ( void )

constructor


## Returns

0 for success


## 8.10 layout.h File Reference

Interface for user specific layout format of log4c\_logging\_event events.

```
#include <log4c/defs.h>  #include <log4c/logging_event.h>
#include <stdio.h> Include dependency graph for layout.h:
```

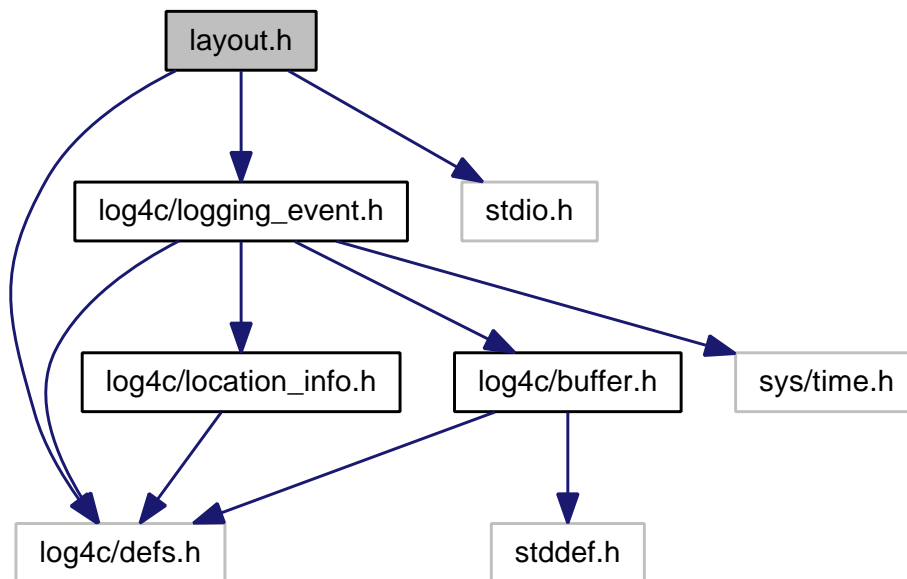

This graph shows which files directly or indirectly include this file:



## Data Structures

- struct **log4c\_layout\_type**  
*log4c layout type class*

## Defines

- #define **log4c\_layout\_type\_define(a\_type)**

### Typedefs

- typedef struct \_\_log4c\_layout **log4c\_layout\_t**
- typedef struct **log4c\_layout\_type** **log4c\_layout\_type\_t**  
*log4c layout type class*

### Functions

- LOG4C\_API const **log4c\_layout\_type\_t** \* **log4c\_layout\_type\_get** (const char \*a\_name)
- LOG4C\_API const **log4c\_layout\_type\_t** \* **log4c\_layout\_type\_set** (const **log4c\_layout\_type\_t** \*a\_type)
- LOG4C\_API **log4c\_layout\_t** \* **log4c\_layout\_get** (const char \*a\_name)
- LOG4C\_API **log4c\_layout\_t** \* **log4c\_layout\_new** (const char \*a\_name)
- LOG4C\_API void **log4c\_layout\_delete** (**log4c\_layout\_t** \*a\_layout)
- LOG4C\_API const char \* **log4c\_layout\_get\_name** (const **log4c\_layout\_t** \*a\_layout)
- LOG4C\_API const **log4c\_layout\_type\_t** \* **log4c\_layout\_get\_type** (const **log4c\_layout\_t** \*a\_layout)
- LOG4C\_API const **log4c\_layout\_type\_t** \* **log4c\_layout\_set\_type** (**log4c\_layout\_t** \*a\_layout, const **log4c\_layout\_type\_t** \*a\_type)
- LOG4C\_API void \* **log4c\_layout\_get\_udata** (const **log4c\_layout\_t** \*a\_layout)
- LOG4C\_API void \* **log4c\_layout\_set\_udata** (**log4c\_layout\_t** \*a\_layout, void \*a\_udata)
- LOG4C\_API const char \* **log4c\_layout\_format** (const **log4c\_layout\_t** \*a\_layout, const **log4c\_logging\_event\_t** \*a\_event)
- LOG4C\_API void **log4c\_layout\_print** (const **log4c\_layout\_t** \*a\_layout, FILE \*a\_stream)
- LOG4C\_API void **log4c\_layout\_types\_print** (FILE \*fp)

#### 8.10.1 Detailed Description

Interface for user specific layout format of log4c\_logging\_event events.

**Todo** the layout interface needs a better configuration system depending on the layout type. The udata field is a just a trick.

**Todo** a pattern layout would be welcomed !!

#### 8.10.2 Define Documentation

##### 8.10.2.1 #define log4c\_layout\_type\_define( a\_type )

Helper macro to define static layout types.

### Parameters

<i>a_type</i>	the log4c_layout_type_t object to define
---------------	--

**Warning**

needs GCC support: otherwise this macro does nothing

**Deprecated** This macro, and the static initialization of layouts in general, is deprecated. Use rather the **log4c\_layout\_type\_set()** (p. 49) function to initialize your appenders before calling **log4c\_init()** (p. 43)

**8.10.3 Typedef Documentation****8.10.3.1 typedef struct \_log4c\_layout log4c\_layout\_t**

log4c layout class

**8.10.3.2 typedef struct log4c\_layout\_type log4c\_layout\_type\_t**

log4c layout type class

Attributes description:

- name layout type name
- format

**8.10.4 Function Documentation****8.10.4.1 LOG4C\_API void log4c\_layout\_delete ( log4c\_layout\_t \* a\_layout )**

Destructor for layout.

**8.10.4.2 LOG4C\_API const char\* log4c\_layout\_format ( const log4c\_layout\_t \* a\_layout, const log4c\_logging\_event\_t \* a\_event )**

format a log4c\_logging\_event events to a string.

**Parameters**

<i>a_layout</i>	the log4c_layout_t object
<i>a_event</i>	a logging_event_t object

## Returns

an appendable string.

**8.10.4.3 LOG4C\_API log4c\_layout\_t\* log4c.layout\_get ( const char \* *a\_name* )**

Get a pointer to an existing layout.

## Parameters

<i>a_name</i>	the name of the layout to return.
---------------	-----------------------------------

## Returns

a pointer to an existing layout, or NULL if no layout with the specified name exists.

**8.10.4.4 LOG4C\_API const char\* log4c.layout\_get\_name ( const log4c\_layout\_t \* *a\_layout* )**

## Parameters

<i>a_layout</i>	the log4c_layout_t object
-----------------	---------------------------

## Returns

the layout name

**8.10.4.5 LOG4C\_API const log4c\_layout\_type\_t\* log4c.layout\_get\_type ( const log4c\_layout\_t \* *a\_layout* )**

## Parameters

<i>a_layout</i>	the log4c_layout_t object
-----------------	---------------------------

## Returns

a log4c\_layout\_type\_t object

**8.10.4.6 LOG4C\_API void\* log4c.layout\_get\_udata ( const log4c\_layout\_t \* *a\_layout* )**

## Parameters

<i>a_layout</i>	the log4c_layout_t object
-----------------	---------------------------

## Returns

the layout user data

**8.10.4.7 LOG4C\_API log4c\_layout\_t\* log4c.layout\_new ( const char \* *a\_name* )**

Constructor for layout.

8.10.4.8 LOG4C\_API void log4c\_layout\_print ( const log4c\_layout\_t \* *a\_layout*, FILE \* *a\_stream* )

prints the layout on a stream

#### Parameters

<i>a_layout</i>	the log4c_layout_t object
<i>a_stream</i>	the stream

8.10.4.9 LOG4C\_API const log4c\_layout\_type\_t\* log4c\_layout\_set\_type ( log4c\_layout\_t \* *a\_layout*, const log4c\_layout\_type\_t \* *a\_type* )

sets the layout type

#### Parameters

<i>a_layout</i>	the log4c_layout_t object
<i>a_type</i>	the new layout type

#### Returns

the previous layout type

8.10.4.10 LOG4C\_API void\* log4c\_layout\_set\_udata ( log4c\_layout\_t \* *a\_layout*, void \* *a\_udata* )

sets the layout user data

#### Parameters

<i>a_layout</i>	the log4c_layout_t object
<i>a_udata</i>	the new layout user data

#### Returns

the previous layout user data

8.10.4.11 LOG4C\_API const log4c\_layout\_type\_t\* log4c\_layout\_type\_get ( const char \* *a\_name* )

Get a pointer to an existing layout type.

#### Parameters

<i>a_name</i>	the name of the layout type to return.
---------------	--

**Returns**

a pointer to an existing layout type, or NULL if no layout type with the specified name exists.

**8.10.4.12 LOG4C\_API const log4c\_layout\_type\_t\* log4c\_layout\_type\_set ( const log4c\_layout\_type\_t\* a\_type )**

Use this function to register a layout type with log4c. Once this is done you may refer to this type by name both programatically and in the log4c configuration file.

**Parameters**

<i>a_type</i>	a pointer to the new layout type to set.
---------------	--

**Returns**

a pointer to the previous layout type of same name.

Example code fragment:

```
const log4c_layout_type_t log4c_layout_type_xml = {
    "s13_xml",
    xml_format,
};

log4c_layout_type_set(&log4c_layout_type_xml);
```

**8.10.4.13 LOG4C\_API void log4c\_layout\_types\_print ( FILE \* fp )**

prints all the current registered layout types on a stream


**Parameters**

<i>fp</i>	the stream
-----------	------------

**8.11 layout\_type\_basic.h File Reference**

Implement a basic layout.

`#include <log4c/defs.h> #include <log4c/layout.h>` Include dependency graph for `layout_type_basic.h`:

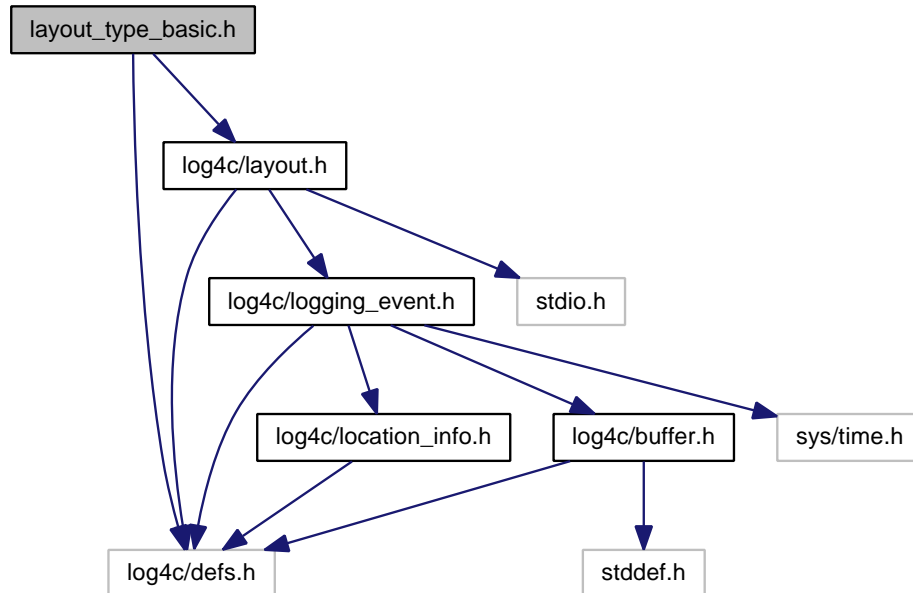

### 8.11.1 Detailed Description

Implement a basic layout. In `log4j.PatternLayout` conventions, the basic layout has the following conversion pattern: `"%P %C - %m\n"`.


Where

- `"%P"` is the priority of the logging event
- `"%C"` is the category of the logging event
- `"%m"` is the application supplied message associated with the logging event

## 8.12 layout\_type\_basic\_r.h File Reference

Implement a `basic_r` layout.

#include <log4c/defs.h> #include <log4c/layout.h> Include dependency graph for layout\_type\_basic\_r.h:

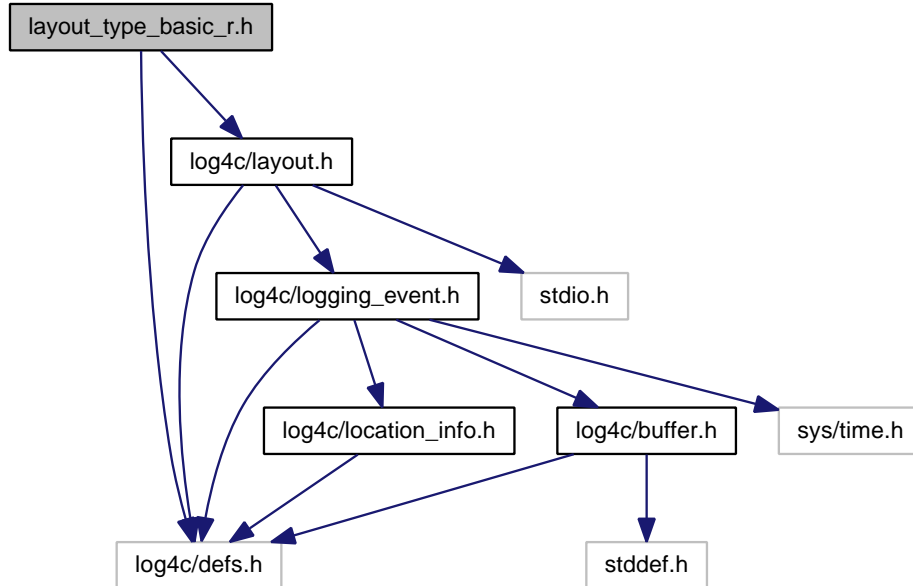

#### 8.12.1 Detailed Description

Implement a `basic_r` layout. In `log4j.PatternLayout` conventions, the `basic_r` layout has the following conversion pattern: `"%P %C - %m\n"`.


Where

- `"%P"` is the priority of the logging event
- `"%C"` is the category of the logging event
- `"%m"` is the application supplied message associated with the logging event

### 8.13 layout\_type\_dated.h File Reference

Implement a dated layout.

`#include <log4c/defs.h> #include <log4c/layout.h>` Include dependency graph for `layout_type_dated.h`:

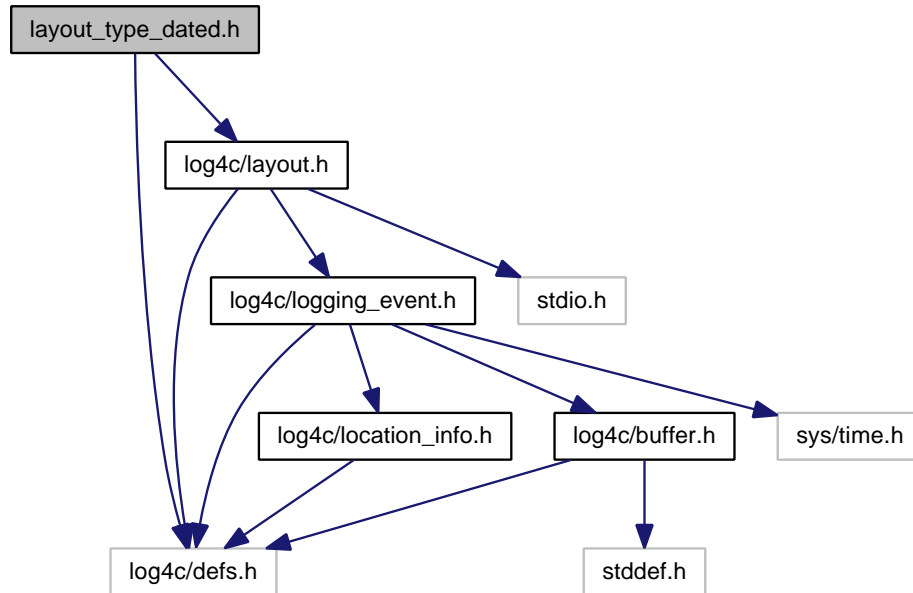

#### 8.13.1 Detailed Description

Implement a dated layout. In `log4j.PatternLayout` conventions, the dated layout has the following conversion pattern: `"%d %P %C - %m\n"`.


Where

- `"%d"` is the date of the logging event
- `"%P"` is the priority of the logging event
- `"%C"` is the category of the logging event
- `"%m"` is the application supplied message associated with the logging event

#### 8.14 layout\_type\_dated\_r.h File Reference

Implement a `dated_r` layout.

`#include <log4c/defs.h> #include <log4c/layout.h>` Include dependency graph for `layout_type_dated_r.h`:

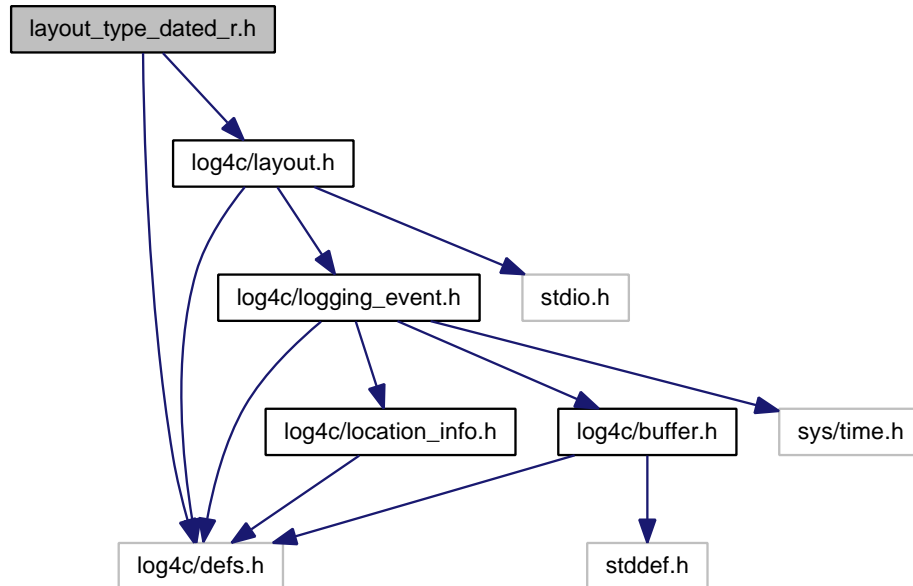

#### 8.14.1 Detailed Description

Implement a `dated_r` layout. In `log4j.PatternLayout` conventions, the `dated_r` layout has the following conversion pattern: `"%d %P %C - %m\n"`.


Where

- `"%d"` is the date of the logging event
- `"%P"` is the priority of the logging event
- `"%C"` is the category of the logging event
- `"%m"` is the application supplied message associated with the logging event


## 8.15 location\_info.h File Reference

The internal representation of caller location information.

#include <log4c/defs.h> Include dependency graph for location\_info.h:



This graph shows which files directly or indirectly include this file:

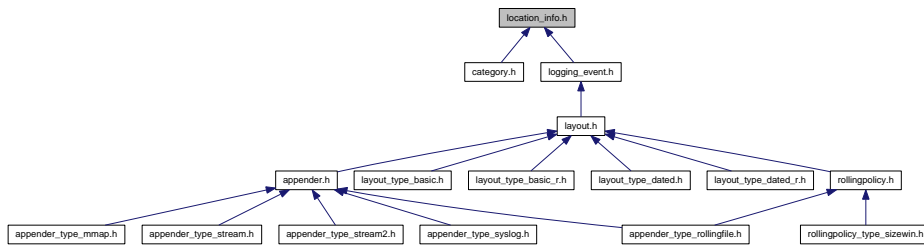

## Data Structures

- struct **log4c\_location\_info\_t**

*logging location information*

## Defines

- #define **LOG4C\_LOCATION\_INFO\_INITIALIZER**(user\_data) { \_\_FILE\_\_, \_\_LINE\_\_, "(nil)", user\_data }
- #define **log4c\_location** \_\_log4c\_location(\_\_LINE\_\_)

### 8.15.1 Detailed Description

The internal representation of caller location information. When a affirmative logging decision is made a **log4c\_location\_info\_t** (p. 9) is created and is passed around the different log4c components.

### 8.15.2 Define Documentation

8.15.2.1 `#define log4c_location __log4c_location(__LINE__)`

This macro returns the literal representation of a logging event location


8.15.2.2 `#define LOG4C_LOCATION_INFO_INITIALIZER( user_data ) { _FILE_, _LINE_, "(nil)", user_data }`

`log4c_location_info_t` (p. 9) initializer


## 8.16 logging\_event.h File Reference

the internal representation of logging events.

```
#include <log4c/defs.h> #include <log4c/buffer.h> #include
<log4c/location_info.h> #include <sys/time.h> Include dependency graph for logging_event.h:
```

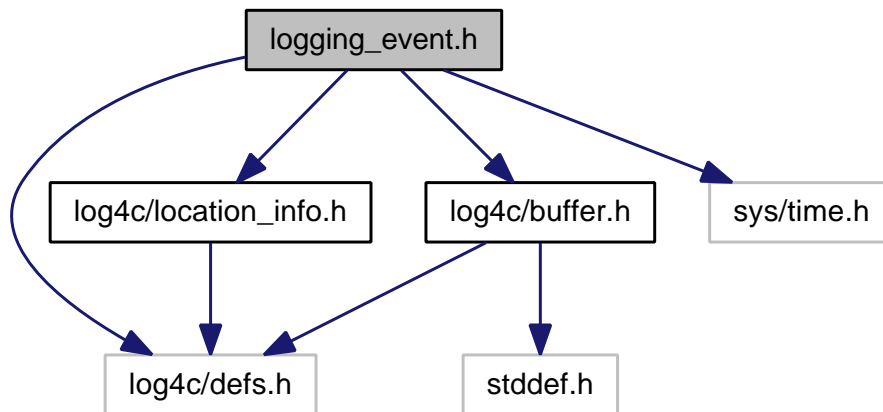

This graph shows which files directly or indirectly include this file:

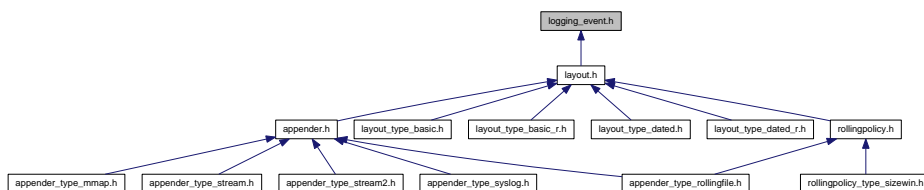

## Data Structures

- struct `log4c_logging_event_t`  
*logging event object*

## Functions

- LOG4C\_API **log4c\_logging\_event\_t** \* **log4c\_logging\_event\_new** (const char \*a\_category, int a\_priority, const char \*a\_message)
- LOG4C\_API void **log4c\_logging\_event\_delete** (log4c\_logging\_event\_t \*a\_event)

## 8.16.1 Detailed Description

the internal representation of logging events. When a affirmative logging decision is made a log4c\_logging\_event instance is created. This instance is passed around the different log4c components.

## 8.16.2 Function Documentation

## 8.16.2.1 LOG4C\_API void log4c\_logging\_event\_delete ( log4c\_logging\_event\_t \* a\_event )

Destructor for a logging event.

## Parameters

<i>a_event</i>	the logging event object
----------------	--------------------------

## 8.16.2.2 LOG4C\_API log4c\_logging\_event\_t\* log4c\_logging\_event\_new ( const char \* a\_category, int a\_priority, const char \* a\_message )

Constructor for a logging event.

## Parameters


<i>a_category</i>	the category name
<i>a_priority</i>	the category initial priority
<i>a_message</i>	the message of this event

**Todo** need to handle multi-threading (NDC)


## 8.17 priority.h File Reference

The priority class provides importance levels with which one can categorize log messages.

#include <log4c/defs.h> Include dependency graph for priority.h:



This graph shows which files directly or indirectly include this file:



#### Enumerations

- enum **log4c\_priority\_level\_t** { **LOG4C\_PRIORITY\_FATAL** = 000, **LOG4C\_PRIORITY\_ALERT** = 100, **LOG4C\_PRIORITY\_CRIT** = 200, **LOG4C\_PRIORITY\_ERROR** = 300, **LOG4C\_PRIORITY\_WARN** = 400, **LOG4C\_PRIORITY\_NOTICE** = 500, **LOG4C\_PRIORITY\_INFO** = 600, **LOG4C\_PRIORITY\_DEBUG** = 700, **LOG4C\_PRIORITY\_TRACE** = 800, **LOG4C\_PRIORITY\_NOTSET** = 900, **LOG4C\_PRIORITY\_UNKNOWN** = 1000 }

#### Functions

- LOG4C\_API const char \* **log4c\_priority\_to\_string** (int a\_priority)
- LOG4C\_API int **log4c\_priority\_to\_int** (const char \*a\_priority\_name)

##### 8.17.1 Detailed Description

The priority class provides importance levels with which one can categorize log messages.

## 8.17.2 Enumeration Type Documentation

### 8.17.2.1 enum log4c\_priority\_level\_t

Predefined Levels of priorities. These correspond to the priority levels used by syslog(3).

Enumerator:

**LOG4C\_PRIORITY\_FATAL** fatal  
**LOG4C\_PRIORITY\_ALERT** alert  
**LOG4C\_PRIORITY\_CRIT** crit  
**LOG4C\_PRIORITY\_ERROR** error  
**LOG4C\_PRIORITY\_WARN** warn  
**LOG4C\_PRIORITY\_NOTICE** notice  
**LOG4C\_PRIORITY\_INFO** info  
**LOG4C\_PRIORITY\_DEBUG** debug  
**LOG4C\_PRIORITY\_TRACE** trace  
**LOG4C\_PRIORITY\_NOTSET** notset  
**LOG4C\_PRIORITY\_UNKNOWN** unknown

## 8.17.3 Function Documentation

### 8.17.3.1 LOG4C\_API int log4c\_priority\_to\_int ( const char \* *a\_priority\_name* )

Parameters

<i>a_priority_name</i>	a priority string name.
------------------------	-------------------------

Returns

the given numeric value of the priority.

References LOG4C\_PRIORITY\_UNKNOWN.

### 8.17.3.2 LOG4C\_API const char\* log4c\_priority\_to\_string ( int *a\_priority* )

Parameters

<i>a_priority</i>	a numeric value of the priority.
-------------------	----------------------------------


Returns

the given priority string name.

## 8.18 rc.h File Reference

log4c resource configuration

#include <log4c/defs.h> Include dependency graph for rc.h:



### Data Structures

- struct **log4c\_rc\_t**  
*resource configuration object*

### Functions

- LOG4C\_API int **log4c\_load** (const char \*a\_filename)

### Variables

- LOG4C\_API **log4c\_rc\_t** \*const **log4c\_rc**

#### 8.18.1 Detailed Description

log4c resource configuration

#### 8.18.2 Function Documentation

##### 8.18.2.1 LOG4C\_API int log4c\_load ( const char \* a\_filename )

load log4c resource configuration file

#### Parameters

<i>a_filename</i>	name of file to load
-------------------	----------------------

## 8.18.3 Variable Documentation


## 8.18.3.1 LOG4C\_API log4c\_rc\_t\* const log4c\_rc

default log4c resource configuration object


## 8.19 rollingpolicy.h File Reference

Log4c rolling policy interface. Defines the interface for managing and providing rolling policies.

```
#include <stdio.h> #include <log4c/defs.h> #include <log4c/layout.h>
h> Include dependency graph for rollingpolicy.h:
```

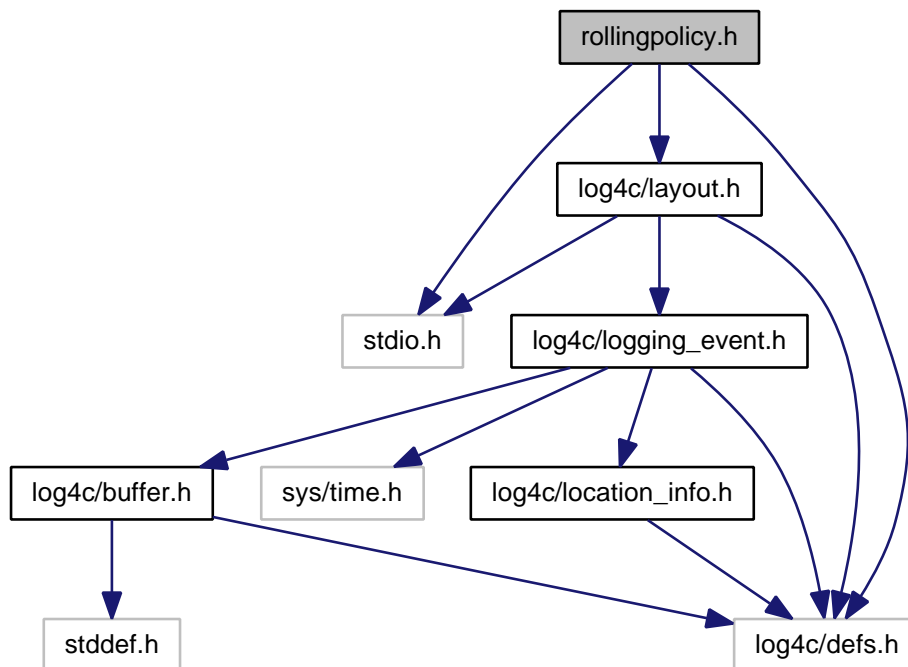

This graph shows which files directly or indirectly include this file:

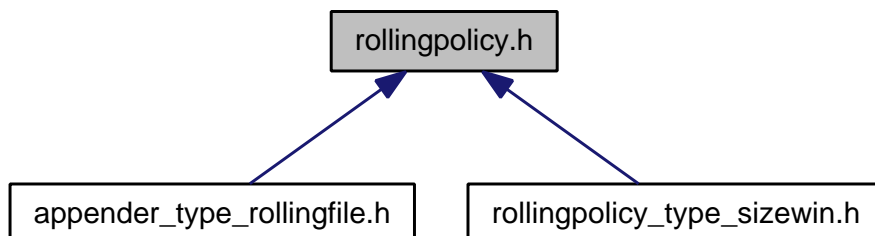

## Data Structures

- struct **log4c\_rollingpolicy\_type**

*log4c rollingpolicy type. Defines the interface a specific policy must provide to the rollingfile appender.*

## Defines

- #define **ROLLINGPOLICY\_ROLLOVER\_ERR\_CAN\_LOG** 0x05

## Typedefs

- typedef struct \_\_log4c\_rollingpolicy **log4c\_rollingpolicy\_t**
- typedef struct **log4c\_rollingpolicy\_type** **log4c\_rollingpolicy\_type\_t**

*log4c rollingpolicy type. Defines the interface a specific policy must provide to the rollingfile appender.*

## Functions

- LOG4C\_API **log4c\_rollingpolicy\_t** \* **log4c\_rollingpolicy\_get** (const char \*policy\_name)
- LOG4C\_API const **log4c\_rollingpolicy\_type\_t** \* **log4c\_rollingpolicy\_type\_set** (const **log4c\_rollingpolicy\_type\_t** \*a\_type)
- LOG4C\_API void **log4c\_rollingpolicy\_set\_udata** (**log4c\_rollingpolicy\_t** \*policyp, void \*udatap)
- LOG4C\_API int **log4c\_rollingpolicy\_init** (**log4c\_rollingpolicy\_t** \*policyp, **rollingfile\_udata\_t** \*rfup)
- LOG4C\_API int **log4c\_rollingpolicy\_fini** (**log4c\_rollingpolicy\_t** \*a\_this)
- LOG4C\_API int **log4c\_rollingpolicy\_is\_triggering\_event** (**log4c\_rollingpolicy\_t** \*policyp, const **log4c\_logging\_event\_t** \*evtp, long current\_file\_size)
- LOG4C\_API const **log4c\_rollingpolicy\_type\_t** \* **log4c\_rollingpolicy\_set\_type** (**log4c\_rollingpolicy\_t** \*a\_rollingpolicy, const **log4c\_rollingpolicy\_type\_t** \*a\_type)
- LOG4C\_API const **log4c\_rollingpolicy\_type\_t** \* **log4c\_rollingpolicy\_type\_get** (const char \*a\_name)
- LOG4C\_API void \* **log4c\_rollingpolicy\_get\_udata** (const **log4c\_rollingpolicy\_t** \*policyp)
- LOG4C\_API **rollingfile\_udata\_t** \* **log4c\_rollingpolicy\_get\_rfudata** (const **log4c\_rollingpolicy\_t** \*policyp)

## 8.19.1 Detailed Description

Log4c rolling policy interface. Defines the interface for managing and providing rolling policies. A rolling policy is used to configure a rollingfile appender to tell it when to trigger a rollover event.

### 8.19.2 Define Documentation

#### 8.19.2.1 #define ROLLINGPOLICY\_ROLLOVER\_ERR\_CAN\_LOG 0x05

Effect a rollover according to *polycyp* on the given file stream.

##### Parameters

<i>polycyp</i>	pointer to the rolling policy
<i>fp</i>	filestream to rollover.

##### Returns

zero if successful, non-zero otherwise. The policy can return an indication that something went wrong but that the rollingfile appender can still go ahead and log by returning an error code  $\leq$  ROLLINGPOLICY\_ROLLOVER\_ERR\_CAN\_LOG. Anything greater than means that the rolling file appender will not try to log its message.

### 8.19.3 Typedef Documentation

#### 8.19.3.1 typedef struct \_log4c\_rollingpolicy log4c\_rollingpolicy\_t

log4c rollingpolicy type

#### 8.19.3.2 typedef struct log4c\_rollingpolicy\_type log4c\_rollingpolicy\_type\_t

log4c rollingpolicy type. Defines the interface a specific policy must provide to the rolling-file appender.

Attributes description:

- name rollingpolicy type name
- *init()* init the rollingpolicy
- *is\_triggering\_event()*
- *rollover()*

### 8.19.4 Function Documentation

#### 8.19.4.1 LOG4C\_API int log4c\_rollingpolicy\_fini ( log4c\_rollingpolicy\_t \* *a\_this* )

Call the un initialization code of a rolling policy. This will call the fini routine of the particular rollingpolicy type to allow it to free up resources. If the call to fini in the rollingpolicy type fails then the rollingpolicy is not uninitialized. Try again later model...

##### Parameters

<i>polycyp</i>	pointer to the rolling policy
----------------	-------------------------------

## Returns

zero if successful, non-zero otherwise.

**8.19.4.2 LOG4C\_API log4c\_rollingpolicy\_t\* log4c\_rollingpolicy\_get ( const char \*  
*policy\_name* )**

Get a new rolling policy

## Parameters

<i>policy_name</i>	a name for the policy
--------------------	-----------------------

## Returns

a new rolling policy, otherwise NULL.

**8.19.4.3 LOG4C\_API rollingfile\_uadata\_t\* log4c\_rollingpolicy\_get\_rfudata ( const  
log4c\_rollingpolicy\_t \* *polycyp* )**

Get the rollingfile appender associated with this policy.

## Parameters

<i>polycyp</i>	pointer to the rolling policy
----------------	-------------------------------

## Returns

pointer to the rolling file appender associated with this policy

**8.19.4.4 LOG4C\_API void\* log4c\_rollingpolicy\_get\_uadata ( const log4c\_rollingpolicy\_t \*  
*polycyp* )**

Get the rolling policy configuration.

## Parameters

<i>polycyp</i>	pointer to the rolling policy
----------------	-------------------------------

## Returns

pointer to the rolling policy configuration.

**8.19.4.5 LOG4C\_API int log4c\_rollingpolicy\_init ( log4c\_rollingpolicy\_t \* *polycyp*,  
rollingfile\_uadata\_t \* *rfup* )**

Call the initialization code of a rolling policy.

## Parameters

<i>polycyp</i>	pointer to the rolling policy
<i>app</i>	the rolling appender this policy is used with

## Returns

zero if successful, non-zero otherwise.

8.19.4.6 LOG4C\_API int log4c\_rollingpolicy\_is\_triggering\_event ( log4c\_rollingpolicy\_t \* *polycyp*, const log4c\_logging\_event\_t \* *evtp*, long *current\_file\_size* )

Determine if a logging event should trigger a rollover according to the given policy.

## Parameters

<i>polycyp</i>	pointer to the rolling policy
<i>evtp</i>	the logging event pointer.
<i>current_file_size</i>	the size of the current file being logged to.

## Returns

non-zero if rollover required, zero otherwise.

8.19.4.7 LOG4C\_API const log4c\_rollingpolicy\_type\_t \* log4c\_rollingpolicy\_set\_type ( log4c\_rollingpolicy\_t \* *a\_rollingpolicy*, const log4c\_rollingpolicy\_type\_t \* *a\_type* )

sets the rolling policy type

## Parameters

<i>a_rollingpolicy</i>	the log4c_rollingpolicy_t object
<i>a_type</i>	the new rollingpolicy type

## Returns

the previous appender type

8.19.4.8 LOG4C\_API void log4c\_rollingpolicy\_set\_udata ( log4c\_rollingpolicy\_t \* *polycyp*, void \* *udatap* )

Configure a rolling policy with a specific policy.

## Parameters

<i>polycyp</i>	pointer to the rolling policy
<i>udatap</i>	a specific policy type, for example sizewin.

**Returns**

zero if successful, non-zero otherwise.

**8.19.4.9 LOG4C\_API** `const log4c_rollingpolicy_type_t* log4c_rollingpolicy_type_get (const char * a_name )`

Get a pointer to an existing rollingpolicy type.

**Parameters**

<i>a_name</i>	the name of the rollingpolicy type to return.
---------------	---

**Returns**

a pointer to an existing rollingpolicy type, or NULL if no rollingpolicy type with the specified name exists.

**8.19.4.10 LOG4C\_API** `const log4c_rollingpolicy_type_t* log4c_rollingpolicy_type_set (const log4c_rollingpolicy_type_t * a_type )`

Use this function to register a rollingpolicy type with log4c. Once this is done you may refer to this type by name both programmatically and in the log4c configuration file.

**Parameters**

<i>a_type</i>	a pointer to the new rollingpolicy type to register.
---------------	--

**Returns**

a pointer to the previous rollingpolicy type of same name.

Example code fragment:


```
const log4c_rollingpolicy_type_t log4c_rollingpolicy_type_sizewin = {
    "sizewin",
    sizewin_init,
    sizewin_is_triggering_event,
    sizewin_rollover
};

log4c_rollingpolicy_type_set(&log4c_rollingpolicy_type_sizewin);
```

**8.20 rollingpolicy\_type\_sizewin.h File Reference**

Log4c rolling file size-win interface. Log4c ships with (and defaults to) the classic size-window rollover policy: this triggers rollover when files reach a maximum size. The first file in the list is always the current file; when a rollover event occurs files are shifted up by one position in the list--if the number of files in the list has already reached the max then the oldest file is rotated out of the window.

```
#include <log4c/defs.h>  #include <log4c/rollingpolicy.-
h> Include dependency graph for rollingpolicy_type_sizewin.h:
```

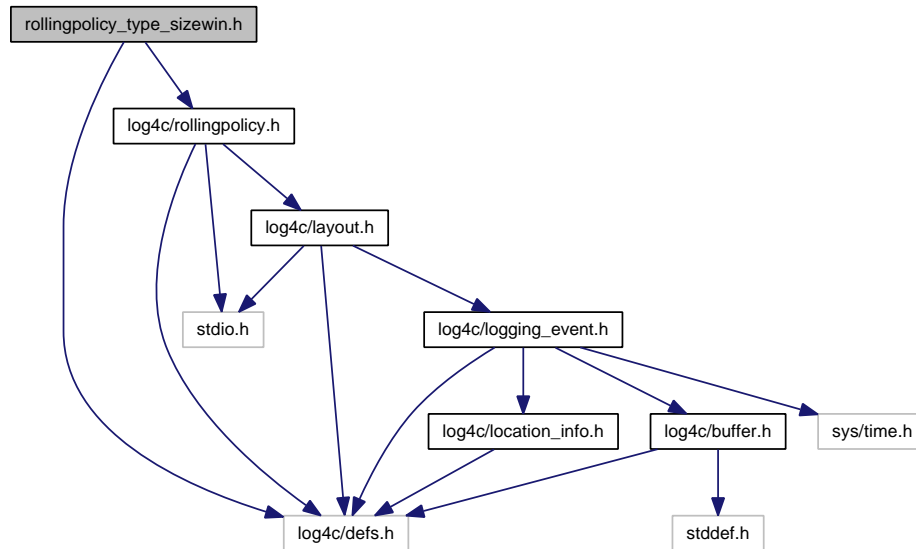

### Typedefs

- typedef struct \_\_sizewin\_udata **rollingpolicy\_sizewin\_udata\_t**

### Functions

- LOG4C\_API **rollingpolicy\_sizewin\_udata\_t** \* **sizewin\_make\_udata** (void)
- LOG4C\_API int **sizewin\_udata\_set\_file\_maxsize** (**rollingpolicy\_sizewin\_udata\_t** \*swup, long max\_size)
- LOG4C\_API int **sizewin\_udata\_set\_max\_num\_files** (**rollingpolicy\_sizewin\_udata\_t** \*swup, long max\_num)
- LOG4C\_API int **sizewin\_udata\_set\_appender** (**rollingpolicy\_sizewin\_udata\_t** \*swup, **log4c\_appender\_t** \*app)

#### 8.20.1 Detailed Description

Log4c rolling file size-win interface. Log4c ships with (and defaults to) the classic size-window rollover policy: this triggers rollover when files reach a maximum size. The first file in the list is always the current file; when a rollover event occurs files are shifted up by one position in the list--if the number of files in the list has already reached the max then the oldest file is rotated out of the window. If the max file size is set to zero, this means 'no-limit'.

The default parameters for the size-win policy are 5 files of maximum size of 20kilobytes each. These parameters may be changed using the appropriate setter functions.

## 8.20.2 Typedef Documentation

### 8.20.2.1 typedef struct `_sizewin_udata` `rollingpolicy_sizewin_udata_t`

log4c size-win rolling policy type

## 8.20.3 Function Documentation

### 8.20.3.1 LOG4C\_API `rollingpolicy_sizewin_udata_t*` `sizewin_make_udata` ( `void` )

Get a new size-win rolling policy

#### Returns

a new size-win rolling policy, otherwise NULL.

### 8.20.3.2 LOG4C\_API `int` `sizewin_udata_set_appender` ( `rollingpolicy_sizewin_udata_t*` *swup*, `log4c_appender_t*` *app* )

Set the rolling file appender in this rolling policy configuration.

#### Parameters

<i>swup</i>	the size-win configuration object.
<i>app</i>	the rolling file appender to set.

#### Returns

zero if successful, non-zero otherwise.

### 8.20.3.3 LOG4C\_API `int` `sizewin_udata_set_file_maxsize` ( `rollingpolicy_sizewin_udata_t*` *swup*, `long` *max\_size* )

Set the maximum file size in this rolling policy configuration.

#### Parameters

<i>swup</i>	the size-win configuration object.
<i>max_size</i>	the approximate maximum size any logging file will attain. If you set zero then it means 'no-limit' and so only one file of unlimited size will be used for logging.

## Returns

zero if successful, non-zero otherwise.

8.20.3.4 LOG4C\_API int sizewin\_udata\_set\_max\_num\_files ( rollingpolicy\_sizewin\_udata\_t \* *swup*, long *max\_num* )

Set the maximum number of files in this rolling policy configuration.

## Parameters

<i>swup</i>	the size-win configuration object.
<i>max_num</i>	the maximum number of files in the list.


## Returns

zero if successful, non-zero otherwise.

## 8.21 version.h File Reference

log4c version information

#include <log4c/defs.h> Include dependency graph for version.h:



## Defines

- #define LOG4C\_MAJOR\_VERSION 1
- #define LOG4C\_MINOR\_VERSION 2
- #define LOG4C\_MICRO\_VERSION 1

## Functions

- const char \* log4c\_version (void)

## Variables

- const int **log4c\_major\_version**
- const int **log4c\_minor\_version**
- const int **log4c\_micro\_version**

### 8.21.1 Detailed Description

log4c version information

### 8.21.2 Define Documentation

#### 8.21.2.1 #define LOG4C\_MAJOR\_VERSION 1

constant macro holding the major version of log4c

#### 8.21.2.2 #define LOG4C\_MICRO\_VERSION 1

constant macro holding the micro version of log4c

#### 8.21.2.3 #define LOG4C\_MINOR\_VERSION 2

constant macro holding the minor version of log4c

### 8.21.3 Function Documentation

#### 8.21.3.1 const char\* log4c\_version ( void )

##### Returns

a string containing the full log4c version

### 8.21.4 Variable Documentation

#### 8.21.4.1 const int log4c\_major\_version

constant variable holding the major version of log4c

#### 8.21.4.2 const int log4c\_micro\_version

constant variable holding the micro version of log4c

#### 8.21.4.3 const int log4c\_minor\_version

constant variable holding the minor version of log4c

## Index

LOG4C\_LOCATION\_INFO\_INITIALIZER  
location\_info.h, 55

LOG4C\_MAJOR\_VERSION  
version.h, 69

LOG4C\_MICRO\_VERSION  
version.h, 69

LOG4C\_MINOR\_VERSION  
version.h, 69

LOG4C\_PRIORITY\_ALERT  
priority.h, 58

LOG4C\_PRIORITY\_CRIT  
priority.h, 58

LOG4C\_PRIORITY\_DEBUG  
priority.h, 58

LOG4C\_PRIORITY\_ERROR  
priority.h, 58

LOG4C\_PRIORITY\_FATAL  
priority.h, 58

LOG4C\_PRIORITY\_INFO  
priority.h, 58

LOG4C\_PRIORITY\_NOTICE  
priority.h, 58

LOG4C\_PRIORITY\_NOTSET  
priority.h, 58

LOG4C\_PRIORITY\_TRACE  
priority.h, 58

LOG4C\_PRIORITY\_UNKNOWN  
priority.h, 58

LOG4C\_PRIORITY\_WARN  
priority.h, 58

ROLLINGPOLICY\_ROLLOVER\_ERR\_C-  
AN\_LOG  
rollingpolicy.h, 62

\_\_log4c\_category\_trace  
category.h, 33

appender.h, 11

- log4c\_appender\_append, 14
- log4c\_appender\_close, 14
- log4c\_appender\_delete, 15
- log4c\_appender\_get, 15
- log4c\_appender\_get\_layout, 15
- log4c\_appender\_get\_name, 15
- log4c\_appender\_get\_type, 15
- log4c\_appender\_get\_udata, 16
- log4c\_appender\_new, 16
- log4c\_appender\_open, 16
- log4c\_appender\_print, 16
- log4c\_appender\_set\_layout, 16
- log4c\_appender\_set\_type, 17
- log4c\_appender\_set\_udata, 17
- log4c\_appender\_t, 14
- log4c\_appender\_type\_define, 13
- log4c\_appender\_type\_get, 17
- log4c\_appender\_type\_set, 18
- log4c\_appender\_type\_t, 14
- log4c\_appender\_types\_print, 18

appender\_type\_mmap.h, 18

- log4c\_appender\_type\_mmap, 20

appender\_type\_rollingfile.h, 20

- log4c\_appender\_type\_rollingfile, 23
- rollingfile\_get\_current\_file\_size, 21
- rollingfile\_make\_udata, 22
- rollingfile\_udata\_get\_files\_prefix, 22
- rollingfile\_udata\_get\_logdir, 22
- rollingfile\_udata\_set\_files\_prefix, 22
- rollingfile\_udata\_set\_logdir, 22
- rollingfile\_udata\_set\_policy, 23

appender\_type\_stream.h, 23

- log4c\_appender\_type\_stream, 25

appender\_type\_stream2.h, 25

- log4c\_appender\_type\_stream2, 28
- log4c\_stream2\_get\_flags, 27
- log4c\_stream2\_get\_fp, 27
- log4c\_stream2\_set\_flags, 27
- log4c\_stream2\_set\_fp, 27

appender\_type\_syslog.h, 28

- log4c\_appender\_type\_syslog, 29

buffer.h, 29

category.h, 30

- \_\_log4c\_category\_trace, 33
- log4c\_category\_alert, 33
- log4c\_category\_crit, 33
- log4c\_category\_debug, 33
- log4c\_category\_define, 32
- log4c\_category\_delete, 34
- log4c\_category\_error, 34
- log4c\_category\_fatal, 34
- log4c\_category\_get, 34
- log4c\_category\_get\_additivity, 34
- log4c\_category\_get\_appender, 35

- log4c\_category\_get\_chainedpriority, 35
- log4c\_category\_get\_name, 35
- log4c\_category\_get\_priority, 35
- log4c\_category\_info, 36
- log4c\_category\_is\_alert\_enabled, 36
- log4c\_category\_is\_crit\_enabled, 36
- log4c\_category\_is\_debug\_enabled, 37
- log4c\_category\_is\_error\_enabled, 37
- log4c\_category\_is\_fatal\_enabled, 37
- log4c\_category\_is\_info\_enabled, 38
- log4c\_category\_is\_notice\_enabled, 38
- log4c\_category\_is\_priority\_enabled, 38
- log4c\_category\_is\_trace\_enabled, 38
- log4c\_category\_is\_warn\_enabled, 39
- log4c\_category\_list, 39
- log4c\_category\_log, 39
- log4c\_category\_log\_locinfo, 40
- log4c\_category\_new, 40
- log4c\_category\_notice, 40
- log4c\_category\_print, 41
- log4c\_category\_set\_additivity, 41
- log4c\_category\_set\_appender, 41
- log4c\_category\_set\_priority, 41
- log4c\_category\_t, 32
- log4c\_category\_warn, 42
- init.h, 42
  - log4c\_fini, 43
  - log4c\_init, 43
- layout.h, 44
  - log4c\_layout\_delete, 46
  - log4c\_layout\_format, 46
  - log4c\_layout\_get, 47
  - log4c\_layout\_get\_name, 47
  - log4c\_layout\_get\_type, 47
  - log4c\_layout\_get\_udata, 47
  - log4c\_layout\_new, 47
  - log4c\_layout\_print, 47
  - log4c\_layout\_set\_type, 48
  - log4c\_layout\_set\_udata, 48
  - log4c\_layout\_t, 46
  - log4c\_layout\_type\_define, 45
  - log4c\_layout\_type\_get, 48
  - log4c\_layout\_type\_set, 49
  - log4c\_layout\_type\_t, 46
  - log4c\_layout\_types\_print, 49
- layout\_type\_basic.h, 49
- layout\_type\_basic\_r.h, 50
- layout\_type\_dated.h, 51
- layout\_type\_dated\_r.h, 52
- location\_info.h, 53
  - LOG4C\_LOCATION\_INFO\_INITIALIZER, 55
  - log4c\_location, 54
- log4c\_appender\_append
  - appender.h, 14
- log4c\_appender\_close
  - appender.h, 14
- log4c\_appender\_delete
  - appender.h, 15
- log4c\_appender\_get
  - appender.h, 15
- log4c\_appender\_get\_layout
  - appender.h, 15
- log4c\_appender\_get\_name
  - appender.h, 15
- log4c\_appender\_get\_type
  - appender.h, 15
- log4c\_appender\_get\_udata
  - appender.h, 16
- log4c\_appender\_new
  - appender.h, 16
- log4c\_appender\_open
  - appender.h, 16
- log4c\_appender\_print
  - appender.h, 16
- log4c\_appender\_set\_layout
  - appender.h, 16
- log4c\_appender\_set\_type
  - appender.h, 17
- log4c\_appender\_set\_udata
  - appender.h, 17
- log4c\_appender\_t
  - appender.h, 14
- log4c\_appender\_type, 7
- log4c\_appender\_type\_define
  - appender.h, 13
- log4c\_appender\_type\_get
  - appender.h, 17
- log4c\_appender\_type\_mmap
  - appender\_type\_mmap.h, 20
- log4c\_appender\_type\_rollingfile

- appender\_type\_rollingfile.h, 23
- log4c\_appender\_type\_set
  - appender.h, 18
- log4c\_appender\_type\_stream
  - appender\_type\_stream.h, 25
- log4c\_appender\_type\_stream2
  - appender\_type\_stream2.h, 28
- log4c\_appender\_type\_syslog
  - appender\_type\_syslog.h, 29
- log4c\_appender\_type\_t
  - appender.h, 14
- log4c\_appender\_types\_print
  - appender.h, 18
- log4c\_buffer\_t, 8
- log4c\_category\_alert
  - category.h, 33
- log4c\_category\_crit
  - category.h, 33
- log4c\_category\_debug
  - category.h, 33
- log4c\_category\_define
  - category.h, 32
- log4c\_category\_delete
  - category.h, 34
- log4c\_category\_error
  - category.h, 34
- log4c\_category\_fatal
  - category.h, 34
- log4c\_category\_get
  - category.h, 34
- log4c\_category\_get\_additivity
  - category.h, 34
- log4c\_category\_get\_appender
  - category.h, 35
- log4c\_category\_get\_chainedpriority
  - category.h, 35
- log4c\_category\_get\_name
  - category.h, 35
- log4c\_category\_get\_priority
  - category.h, 35
- log4c\_category\_info
  - category.h, 36
- log4c\_category\_is\_alert\_enabled
  - category.h, 36
- log4c\_category\_is\_crit\_enabled
  - category.h, 36
- log4c\_category\_is\_debug\_enabled
  - category.h, 37
- log4c\_category\_is\_error\_enabled
  - category.h, 37
- log4c\_category\_is\_fatal\_enabled
  - category.h, 37
- log4c\_category\_is\_info\_enabled
  - category.h, 38
- log4c\_category\_is\_notice\_enabled
  - category.h, 38
- log4c\_category\_is\_priority\_enabled
  - category.h, 38
- log4c\_category\_is\_trace\_enabled
  - category.h, 38
- log4c\_category\_is\_warn\_enabled
  - category.h, 39
- log4c\_category\_list
  - category.h, 39
- log4c\_category\_log
  - category.h, 39
- log4c\_category\_log\_locinfo
  - category.h, 40
- log4c\_category\_new
  - category.h, 40
- log4c\_category\_notice
  - category.h, 40
- log4c\_category\_print
  - category.h, 41
- log4c\_category\_set\_additivity
  - category.h, 41
- log4c\_category\_set\_appender
  - category.h, 41
- log4c\_category\_set\_priority
  - category.h, 41
- log4c\_category\_t
  - category.h, 32
- log4c\_category\_warn
  - category.h, 42
- log4c\_fini
  - init.h, 43
- log4c\_init
  - init.h, 43
- log4c\_layout\_delete
  - layout.h, 46
- log4c\_layout\_format
  - layout.h, 46
- log4c\_layout\_get
  - layout.h, 47
- log4c\_layout\_get\_name
  - layout.h, 47
- log4c\_layout\_get\_type
  - layout.h, 47
- log4c\_layout\_get\_udata
  - layout.h, 47

- log4c\_layout\_new
  - layout.h, 47
- log4c\_layout\_print
  - layout.h, 47
- log4c\_layout\_set\_type
  - layout.h, 48
- log4c\_layout\_set\_udata
  - layout.h, 48
- log4c\_layout\_t
  - layout.h, 46
- log4c\_layout\_type, 8
- log4c\_layout\_type\_define
  - layout.h, 45
- log4c\_layout\_type\_get
  - layout.h, 48
- log4c\_layout\_type\_set
  - layout.h, 49
- log4c\_layout\_type\_t
  - layout.h, 46
- log4c\_layout\_types\_print
  - layout.h, 49
- log4c\_load
  - rc.h, 59
- log4c\_location
  - location\_info.h, 54
- log4c\_location\_info\_t, 9
- log4c\_logging\_event\_delete
  - logging\_event.h, 56
- log4c\_logging\_event\_new
  - logging\_event.h, 56
- log4c\_logging\_event\_t, 9
- log4c\_major\_version
  - version.h, 69
- log4c\_micro\_version
  - version.h, 69
- log4c\_minor\_version
  - version.h, 69
- log4c\_priority\_level\_t
  - priority.h, 58
- log4c\_priority\_to\_int
  - priority.h, 58
- log4c\_priority\_to\_string
  - priority.h, 58
- log4c\_rc
  - rc.h, 60
- log4c\_rc\_t, 10
- log4c\_rollingpolicy\_fini
  - rollingpolicy.h, 62
- log4c\_rollingpolicy\_get
  - rollingpolicy.h, 63
- log4c\_rollingpolicy\_get\_rfudata
  - rollingpolicy.h, 63
- log4c\_rollingpolicy\_get\_udata
  - rollingpolicy.h, 63
- log4c\_rollingpolicy\_init
  - rollingpolicy.h, 63
- log4c\_rollingpolicy\_is\_triggering\_event
  - rollingpolicy.h, 64
- log4c\_rollingpolicy\_set\_type
  - rollingpolicy.h, 64
- log4c\_rollingpolicy\_set\_udata
  - rollingpolicy.h, 64
- log4c\_rollingpolicy\_t
  - rollingpolicy.h, 62
- log4c\_rollingpolicy\_type, 11
- log4c\_rollingpolicy\_type\_get
  - rollingpolicy.h, 65
- log4c\_rollingpolicy\_type\_set
  - rollingpolicy.h, 65
- log4c\_rollingpolicy\_type\_t
  - rollingpolicy.h, 62
- log4c\_stream2\_get\_flags
  - appender\_type\_stream2.h, 27
- log4c\_stream2\_get\_fp
  - appender\_type\_stream2.h, 27
- log4c\_stream2\_set\_flags
  - appender\_type\_stream2.h, 27
- log4c\_stream2\_set\_fp
  - appender\_type\_stream2.h, 27
- log4c\_version
  - version.h, 69
- logging\_event.h, 55
  - log4c\_logging\_event\_delete, 56
  - log4c\_logging\_event\_new, 56
- priority.h, 56
  - LOG4C\_PRIORITY\_ALERT, 58
  - LOG4C\_PRIORITY\_CRIT, 58
  - LOG4C\_PRIORITY\_DEBUG, 58
  - LOG4C\_PRIORITY\_ERROR, 58
  - LOG4C\_PRIORITY\_FATAL, 58
  - LOG4C\_PRIORITY\_INFO, 58
  - LOG4C\_PRIORITY\_NOTICE, 58
  - LOG4C\_PRIORITY\_NOTSET, 58
  - LOG4C\_PRIORITY\_TRACE, 58
  - LOG4C\_PRIORITY\_UNKNOWN, 58
  - LOG4C\_PRIORITY\_WARN, 58
  - log4c\_priority\_level\_t, 58
  - log4c\_priority\_to\_int, 58
  - log4c\_priority\_to\_string, 58

- rc.h, 59
  - log4c\_load, 59
  - log4c\_rc, 60
- rollingfile\_get\_current\_file\_size
  - appender\_type\_rollingfile.h, 21
- rollingfile\_make\_udata
  - appender\_type\_rollingfile.h, 22
- rollingfile\_udata\_get\_files\_prefix
  - appender\_type\_rollingfile.h, 22
- rollingfile\_udata\_get\_logdir
  - appender\_type\_rollingfile.h, 22
- rollingfile\_udata\_set\_files\_prefix
  - appender\_type\_rollingfile.h, 22
- rollingfile\_udata\_set\_logdir
  - appender\_type\_rollingfile.h, 22
- rollingfile\_udata\_set\_policy
  - appender\_type\_rollingfile.h, 23
- rollingpolicy.h, 60
  - ROLLINGPOLICY\_ROLLOVER\_ER-  
R\_CAN\_LOG, 62
  - log4c\_rollingpolicy\_fini, 62
  - log4c\_rollingpolicy\_get, 63
  - log4c\_rollingpolicy\_get\_rfudata, 63
  - log4c\_rollingpolicy\_get\_udata, 63
  - log4c\_rollingpolicy\_init, 63
  - log4c\_rollingpolicy\_is\_triggering\_  
event, 64
  - log4c\_rollingpolicy\_set\_type, 64
  - log4c\_rollingpolicy\_set\_udata, 64
  - log4c\_rollingpolicy\_t, 62
  - log4c\_rollingpolicy\_type\_get, 65
  - log4c\_rollingpolicy\_type\_set, 65
  - log4c\_rollingpolicy\_type\_t, 62
- rollingpolicy\_sizewin\_udata\_t
  - rollingpolicy\_type\_sizewin.h, 67
- rollingpolicy\_type\_sizewin.h, 65
  - rollingpolicy\_sizewin\_udata\_t, 67
  - sizewin\_make\_udata, 67
  - sizewin\_udata\_set\_appender, 67
  - sizewin\_udata\_set\_file\_maxsize, 67
  - sizewin\_udata\_set\_max\_num\_files,  
68
- sizewin\_make\_udata
  - rollingpolicy\_type\_sizewin.h, 67
- sizewin\_udata\_set\_appender
  - rollingpolicy\_type\_sizewin.h, 67
- sizewin\_udata\_set\_file\_maxsize
  - rollingpolicy\_type\_sizewin.h, 67
- sizewin\_udata\_set\_max\_num\_files
  - rollingpolicy\_type\_sizewin.h, 68
- version.h, 68
  - LOG4C\_MAJOR\_VERSION, 69
  - LOG4C\_MICRO\_VERSION, 69
  - LOG4C\_MINOR\_VERSION, 69
  - log4c\_major\_version, 69
  - log4c\_micro\_version, 69
  - log4c\_minor\_version, 69
  - log4c\_version, 69